


Features

- 32-bit ARM Cortex-M4 CPU Core with FPU
 - 200MHz maximum frequency
- Memories
 - Up to 128 KB embedded flash
 - 512 Bytes OTP flash
 - Up to 64 KB on-chip SRAM
- Pre-Driver Module
 - Two 3-Phase Pre-Drivers for dual BLDC motor control application with 60V max input voltage
 - Integrated bootstrap diodes
 - Integrated charge pump up to 100% duty cycle
 - Max 1A pull-up and 1.3A pull-down driving capability on each phase
 - Programmable output swing from 9V to 18V
 - Six V_{DS} monitors to current limit on each of the external high side FET's and short detection
- Clock, reset and supply management
 - Brown-out Detect (BOD) on each power rail
 - 3.3V power supply for MCU
 - Power-On Reset (POR)
 - 1 to 66 MHz external crystal oscillator
 - 32 MHz factory-trimmed oscillator
 - Typical 2.2MHz safety clock
 - PLL for CPU clock
- 14-bit A/D converters (up to 16 channels)
 - As low as 140 ns conversion time
 - Conversion range: 0 to 3.65 V

- Differential sampler

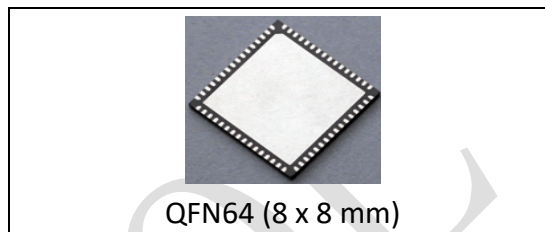

- Triple-sample and hold capability
- Open/short detection for safety
- Temperature sensor

- Programmable gain amplifier (PGA)

- Three integrated internal PGAs
- Programmable Gains
 - Single-ended: 1, 2, 4, 8, 12, 16, 24, 32
 - Differential: 2, 4, 8, 16, 24, 32, 48, 64

- Typical 600 ns settling time

- Analog comparator

- Ten high-speed comparators
- Output with digital deglitch filter
- 4 DACs as reference
- Optional DAC output buffer
- Out of range voltage protection
- Phase comparison

- PWM

- Six enhanced PWM modules
- 12 PWM outputs in total
- Flexible waveform generation with phase lead/lag control
- All events can trigger ADC conversion

- Up to 27 GPIO Pins

- Configurable pull-up/pull-down resistors
- Programmable digital input deglitch filter

- Enhanced Capture Module (ECAP)
 - Flexible input capture pin
 - Four 32-bit capture registers
 - Capture and PWM mode selection
- Debug mode
 - Serial wire debug (SWD) & JTAG interfaces
- 6 Timers
 - Three 32-bit general-purpose timers
 - Two 32-bit watchdog timers
 - SysTick timer 24-bit down-counter
- Communication interfaces
 - UART x 1, SPI x 1, I²C x 1
- Security Modules
 - CRC x 1, AES x 1, 64-bit unique ID
- Operating temperature
 - Junction temperature: -40 to +125 °C
 - Ambient temperature: -40 to +105 °C

Important Statement and Disclaimer

The information in this document is provided exclusively for use with products of Spintrol Electronic Technology Co., Ltd. (hereinafter referred to as "the Company"). The Company and its subsidiaries reserve the right to make changes, corrections, enhancements and modifications to the products and/or this document at any time without prior notice. Users shall obtain the latest version of the document before placing orders to ensure that the information and data used are the latest and valid versions. The content of this document supersedes all previously provided relevant information.

The Company endeavors to provide accurate, complete and up-to-date information; however, this document and its contents are provided on an "as is" and "as available" basis. To the fullest extent permitted by applicable law, the Company makes no representations or warranties of any kind, whether express or implied, with respect to this document and its contents, including but not limited to any implied warranties of completeness, authenticity, accuracy, merchantability, fitness for a particular purpose, or non-infringement of third-party intellectual property rights.

Any examples, hints, typical values and product application information contained in this document shall not constitute any warranty of product conditions or characteristics. The Company assumes no warranty or liability of any form in this regard, including without limitation any warranty of non-infringement of any third-party intellectual property rights.

The resources contained in this document are intended solely for use by skilled technical personnel familiar with the product design of the Company. Users shall bear full sole responsibility for the following: (1) Selecting suitable products for their own applications; (2) Designing, verifying and testing their applications; (3) Ensuring their applications comply with relevant standards and all safety and regulatory compliance requirements.

The user's technical department shall independently evaluate the suitability of the products for target applications, as well as the completeness and applicability of the information in this document for such applications. Otherwise, the user shall be fully liable for all claims, damages, costs, losses and liabilities incurred by the Company and its related parties, and the Company shall assume no relevant responsibilities whatsoever.

The provision of the aforesaid resources by the Company shall not extend or otherwise alter the applicable warranties or warranty disclaimers issued by the Company for its products. Unless explicitly approved by a written document signed by an authorized representative of the Company, the Company's products shall not be used in any application scenarios where product failure or the consequences of its use could reasonably be expected to cause personal injury.

All trademarks and other product or service names of the Company belong to their respective owners. No intellectual property license is granted either expressly or impliedly under this document.

For further information on technology, delivery terms and pricing, please consult the Company's sales staff and technical support, or visit the official website: <https://www.spintrol.com>.

Contents

1	Device overview	11
2	Feature descriptions	12
2.1	ARM Cortex-M4 core	12
2.2	Embedded SRAM	12
2.3	Embedded Flash memory	12
2.4	Nested vectored interrupt controller (NVIC)	12
2.5	External interrupt/event controller	12
2.6	Power supply and Reset.....	12
2.7	Brown-out detector	13
2.8	Clocks	13
2.9	Boot mode	14
2.10	General-purpose I/Os (GPIOs)	14
2.11	Timers and watchdogs	14
2.12	UART	15
2.13	I2C	15
2.14	SPI	16
2.15	ADC	16
2.16	Temperature sensor.....	16
2.17	PGAs.....	17
2.18	Analog comparators.....	17
2.19	PWMs.....	17
2.20	ECAP	18
2.21	Cyclic redundancy check (CRC)	18
2.22	Advanced encryption standard (AES) engine.....	18
2.23	Serial wire JTAG debug port (SWJ-DP)	19
2.24	Pre-Driver system.....	19
3	Pinout and pin description	20
3.1	QFN64	20
3.2	PGA input channel selection	26
3.3	GPIO pin function and state after reset	27

4	Memory mapping	29
5	Electrical characteristics	30
5.1	Absolute maximum ratings	30
5.2	Recommended operating conditions.....	30
5.3	I/O Electrical characteristics	31
5.4	Power consumption summary	32
5.5	Internal 1.2V regulator characteristics	36
5.6	BOD characteristics	37
5.7	RCO characteristics	37
5.8	PLL characteristics	37
5.9	XO characteristics	37
5.10	14-bit ADC characteristics	42
5.11	PGA characteristics	43
5.12	Analog comparator characteristics	44
5.13	Internal 10-bit DAC characteristics	44
5.14	DAC buffer characteristics	45
5.15	Flash memory characteristics	45
5.16	Electrical sensitivity characteristics	46
5.17	Moisture sensitivity characteristics	46
5.18	Thermal resistance characteristics.....	46
5.19	SPI characteristics	47
5.20	Pre-Driver characteristics.....	48
5.21	12V linear regulator characteristics	48
6	PCB layout guidance for Pre-Driver	49
7	Package information	50
7.1	QFN64	50
7.1.1	Package Type A.....	50
7.1.2	Package Type B.....	51
7.1.3	Recommended Soldering Dimensions	52
8	Ordering information.....	53

List of tables

Table 3-1: SPD1178 pin definitions	21
Table 3-2: PGA input channel selection	26
Table 3-3: GPIO pin function and state after reset.....	27
Table 5-1: Absolute maximum ratings ^{[1][2]}	30
Table 5-2: Recommended operating conditions	30
Table 5-3: I/O Electrical characteristics	31
Table 5-4: SPD1178 typical current consumption (Run in FLASH, Pre-Driver not included)	33
Table 5-5: SPD1178 typical current consumption (Run in RAM, Pre-Driver not included)	33
Table 5-6: Peripheral current consumption	34
Table 5-7: Pre-Driver static current consumption	35
Table 5-8: Internal 1.2V regulator characteristics	36
Table 5-9: BOD characteristics	37
Table 5-10: RCO characteristics	37
Table 5-11: PLL characteristics	37
Table 5-12: XO characteristics	37
Table 5-13: ADC characteristics.....	42
Table 5-14: PGA characteristics.....	43
Table 5-15: Comparator characteristics	44
Table 5-16: DAC characteristics.....	44
Table 5-17: DAC buffer characteristics	45
Table 5-18: Flash memory characteristics.....	45
Table 5-19: ESD absolute maximum ratings.....	46
Table 5-20: Electrical sensitivities	46
Table 5-21: Moisture sensitivity characteristic	46
Table 5-22: Thermal resistance characteristics (QFN64 package).....	46
Table 5-23: SPI characteristics.....	47
Table 5-24: Pre-Driver characteristics	48
Table 5-25: 12V linear regulator characteristics.....	48
Table 7-1: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package mechanical data(A)	50
Table 7-2: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package mechanical data(B).....	52
Table 8-1: Ordering information	53

List of figures

Figure 1-1: SPD1178 block diagram	11
Figure 2-1: Clock tree	13
Figure 3-1: SPD1178 QFN64 pin-out	20
Figure 4-1: Memory map	29
Figure 5-1: Typical operational current versus frequency.....	34
Figure 5-2: Internal 1.2V regulator load regulation ($T_A = 25\text{ }^{\circ}\text{C}$)	36
Figure 5-3: Internal 1.2V regulator load regulation with different temperature	36
Figure 5-4: The negative resistance of the on-chip crystal oscillator at 50°C	38
Figure 5-5: The negative resistance of the on-chip crystal oscillator at 85°C	39
Figure 5-6: The negative resistance of the on-chip crystal oscillator at 100°C	40
Figure 5-7: The negative resistance of the on-chip crystal oscillator at 125°C	41
Figure 5-8: DAC buffer offset over Input voltage	45
Figure 6-1: Simplified Pre-Driver Board Schematic.....	49
Figure 7-1: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package outline(A).....	50
Figure 7-2: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package outline(B).....	51
Figure 7-3: QFN64 – 64-pin, 8mm x 8mm Quad Flat No-lead Package Land Pattern and Recommended Soldering Dimensions Diagram	52
Figure 8-1: Rule of ordering number	53

Revision history

Version	Date	Author	Status	Changes
1	2019-04-01	—	Outdated	1. Initial release.
2	2019-04-11	—	Outdated	Modifies Table 3-1 for adding SIO pin definitions.
3	2020-05-20	—	Outdated	1. Modifies the description of power supply pin in Table 3-1. 2. Updates the maximum value of VBAT to 60V.
4	2019-08-15	—	Outdated	1. Updates package information in Table 7-1. 2. Modifies JTAG pin descriptions in Table 3-1.
5	2019-12-20	—	Outdated	1. Add Table 5-19. 2. Add Table 5-20.
6	2020-06-13	—	Outdated	1. Update Section 2.9 for boot mode description. 2. Update Section 2.14 and modify the maximum speed of SPI. 3. Update Section 2.18 for phase comparison. 4. Update Table 5-3. 5. Update Table 5-8. 6. Update Figure 5-2. 7. Add Table 5-9. 8. Add Table 5-10. 9. Add Table 5-11. 10. Add Table 5-12. 11. Update Table 5-13. 12. Add Table 5-22. 13. Add Table 5-23. 14. Add Table 8-1.
7	2020-07-04	—	Outdated	1. Update chip features. 2. Update Section 2.12 for UART features. 3. Update Table 5-14 and modify the value of R_{IN} parameter. 4. Update Table 5-25.
8	2020-07-31	—	Outdated	1. Add Figure 5-3. 2. Update Table 5-14. 3. Update Table 5-18.
9	2021-03-28	—	Outdated	1. Update Table 5-3. 2. Add characteristics of ambient temperature T_A . 3. Update Section 2.6. 4. Update Table 5-1. 5. Update Section 2.12 for UART features. 6. Update Table 5-14. 7. Update Figure 7-1.

Version	Date	Author	Status	Changes
				8. Add Table 3-2. 9. Update comparator pin descriptions in Table 3-1. 10. Add Table 3-3. 11. Add note for Table 5-4. 12. Add note for Table 5-5. 13. Update Table 5-6. 14. Update Figure 3-1 and its notes.
10	2021-11-27	–	Outdated	1. Add Table 5-21. 2. Update Table 3-2. 3. Update Table 5-15. 4. Add Figure 5-4. 5. Add Figure 5-5. 6. Add Figure 5-6. 7. Add Figure 5-7. 8. Update Table 3-1, modify the description for debug pins. 9. Update deep-sleep current consumption value in Table 5-4.
11	2022-10-11	–	Outdated	1. Update Section 2.21. Update Section 2.21, remove parameter I_{OZ} .
A/0	2022-05-22	H. Huang	Outdated	1. Update Section 2.9 and Section 2.10. Update Conditions of parameter R_{PU} and R_{PD} in Table 5-3. Update Table 3-2. Update Section 2.6.
A/1	2023-05-09	L. Chen	Outdated	1. Add VDDG maximum withstand voltage information.
C/0	2024-06-25	J. Zhou	Outdated	1. Modify document style.
C/1	2025-02-24	J. Zhou	Outdated	1. Modify Figure 6-1.
C/2	2025-12-10	J. Zhou	Outdated	1. Add new QFN64 package outline drawing and dimensions. 2. Modify Table 5-10.
C/3	2026-07-28	J. Zhou	Outdated	1. Delete SIO. 2. Add Figure 2-1 in Section 2.8. 3. Modify I2C rate of High-Speed mode. 4. Add Important Statement and Disclaimer.
C/4	2026-08-28	J. Zhou	Released	1. Update SPQ in Table 8-1.

Terms or abbreviations

Terms or abbreviations	Description
MCU	Microcontroller Unit
SWD	Serial Wire Debug
AHB	Advanced High Performance Bus
XIP	Execution In Place
PLL	Phase Locked Loop
BOD	Brownout Detector
PFD	Phase Frequency Detector
NVIC	Nested Vectored Interrupt Controller
UART	Universal Asynchronous Receiver-Transmitter
ADC	Analog-to-Digital Converter
DAC	Digital-to-Analog Converter
PGA	Programmable-Gain Amplifier
CRC	Cyclic Redundancy Check
AES	Advanced Encryption Standard


1 Device overview

The SPD1178 device from Spintrol is a highly integrated system-on-chip (SoC) microcontroller with dual 3-phase pre-drivers. The SPD1178 incorporates a 32-bit ARM Cortex-M4 high-performance processor with a software-programmable clock rate as high as 200 MHz, 64 KB SRAM, embedded flash with 128 KB, and an extensive range of enhanced I/Os and peripherals. The device offers a 14-bit ADC, three PGAs, six enhanced PWMs, three general purpose 32-bit timers, as well as standard and advanced communication interface: an UART, an I²C and a SPI. These features make the SPD1178 ideal for motor control application.

The SPD1178 operates from a 2.97 to 3.63 V power supply for the MCU, and from 7V to 60V for the pre-driver. The temperature range is from -40 °C to +125 °C. The package type is 64-pin QFN.

Figure 1-1 shows the functional block diagram for the SPD1178.

Figure 1-1: SPD1178 block diagram

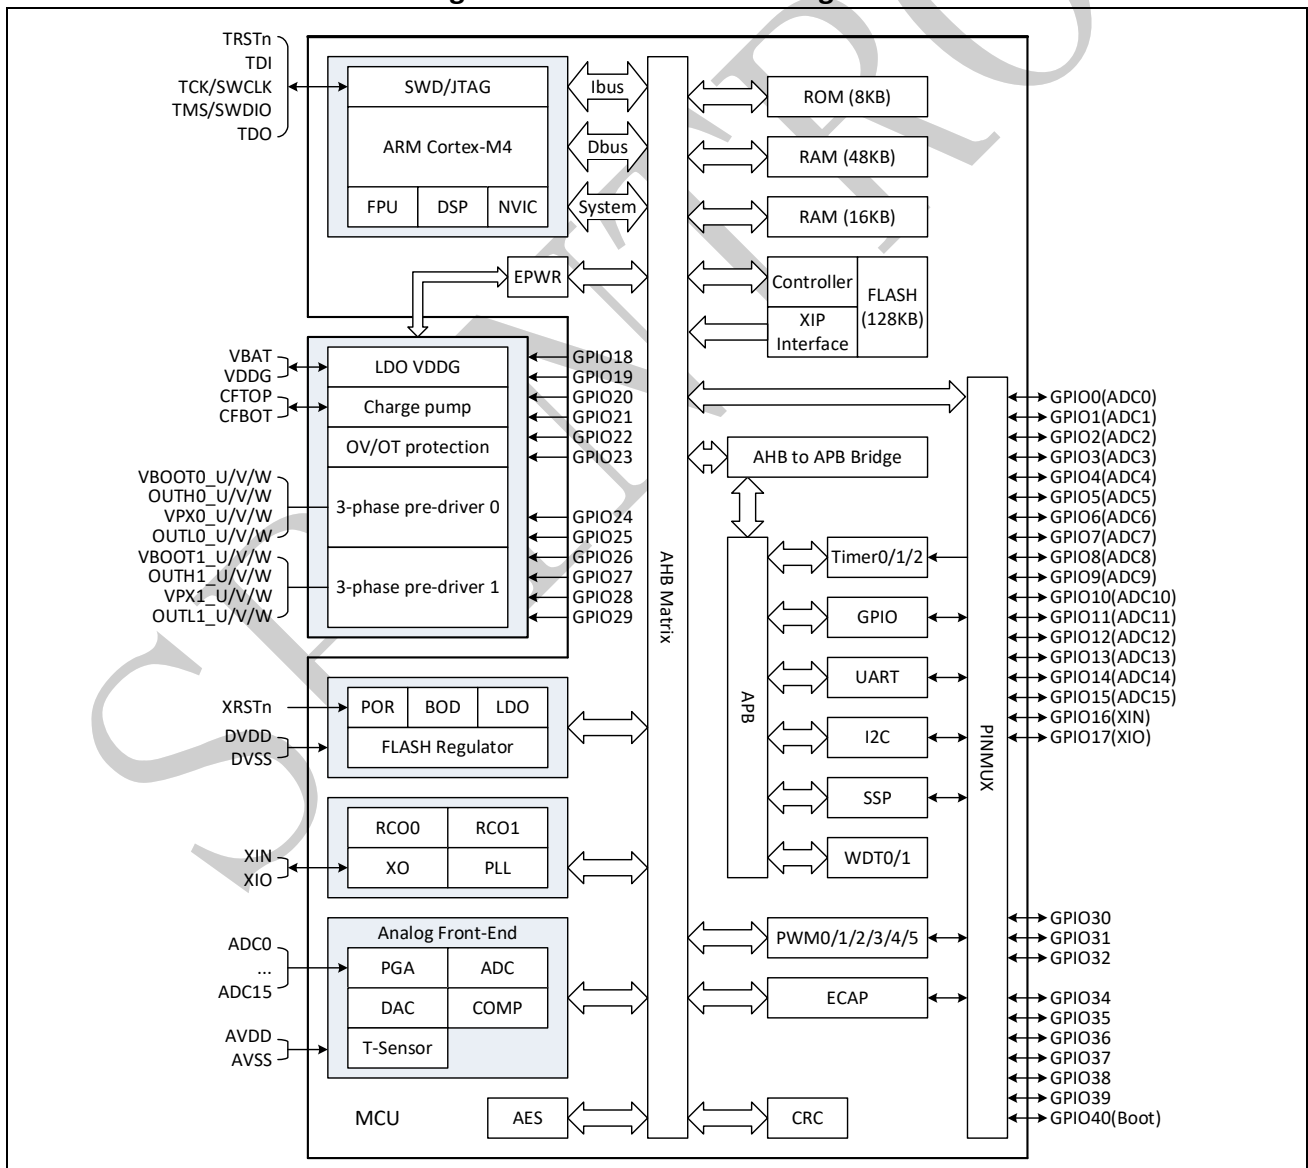

2 Feature descriptions

2.1 ARM Cortex-M4 core

The ARM Cortex-M4 processor has been developed to provide a low-cost platform that meets the needs of MCU implementation, with a reduced pin count and low-power consumption, while delivering outstanding computational performance and an advanced system response to interrupts.

The SPD1178 integrates a full-feature ARM Cortex-M4 core with FPU that can run up to 200MHz. Therefore, it is compatible with all ARM tools and software.

2.2 Embedded SRAM

The SPD1178 has implemented 64 KB SRAM memory for code and data. The SRAM can be accessed (read/write) at CPU clock speed with 0 wait states.

2.3 Embedded Flash memory

Up to 128 KB of embedded Flash memory is available for storing programs and data.

2.4 Nested vectored interrupt controller (NVIC)

The SPD1178 embeds a nested vectored interrupt controller able to handle up to 51 mask-able interrupt channels (not including the 16 interrupt lines of Cortex-M4) and 16 programmable priority levels.

- Closely coupled NVIC gives low-latency interrupt processing
- Interrupt entry vector table address passed directly to the core
- Processing of late arriving higher priority interrupts
- Support for tail-chaining
- Support for lazy-stacking
- Interrupt entry restored on interrupt exit with no instruction overhead

2.5 External interrupt/event controller

The SPD1178 provides a flexible external pin interrupt or event trigger mechanism. Any GPIO pin can be programmed as an external interrupt or event trigger source. In addition, any GPIO interrupt can be configured as edge-triggered or level-triggered.

2.6 Power supply and Reset

The SPD1178 requires 3.3V power supply for the MCU, supply ramp-up rate less than or equal $1.5 \times 10^4 \text{V/s}$.

7V to 60V power supply for the pre-driver.


The SPD1178 has a global reset pin as well as an integrated power-on reset (POR) circuitry. The POR circuitry guarantees all power-up reset sequence requirements and makes the device easy to use.

2.7 Brown-out detector

The device features an embedded brown-out detector (BOD) that monitors the 3.3V/1.2V domain power supply and compare it to the programmable pre-set value. An interrupt or reset can be generate when voltage of the power domain is higher or drops below the pre-set value. The interrupt service routine then generate a warning message and/or put the MCU into a safe state. The BOD is enabled by software.

2.8 Clocks

Figure 2-1: Clock tree

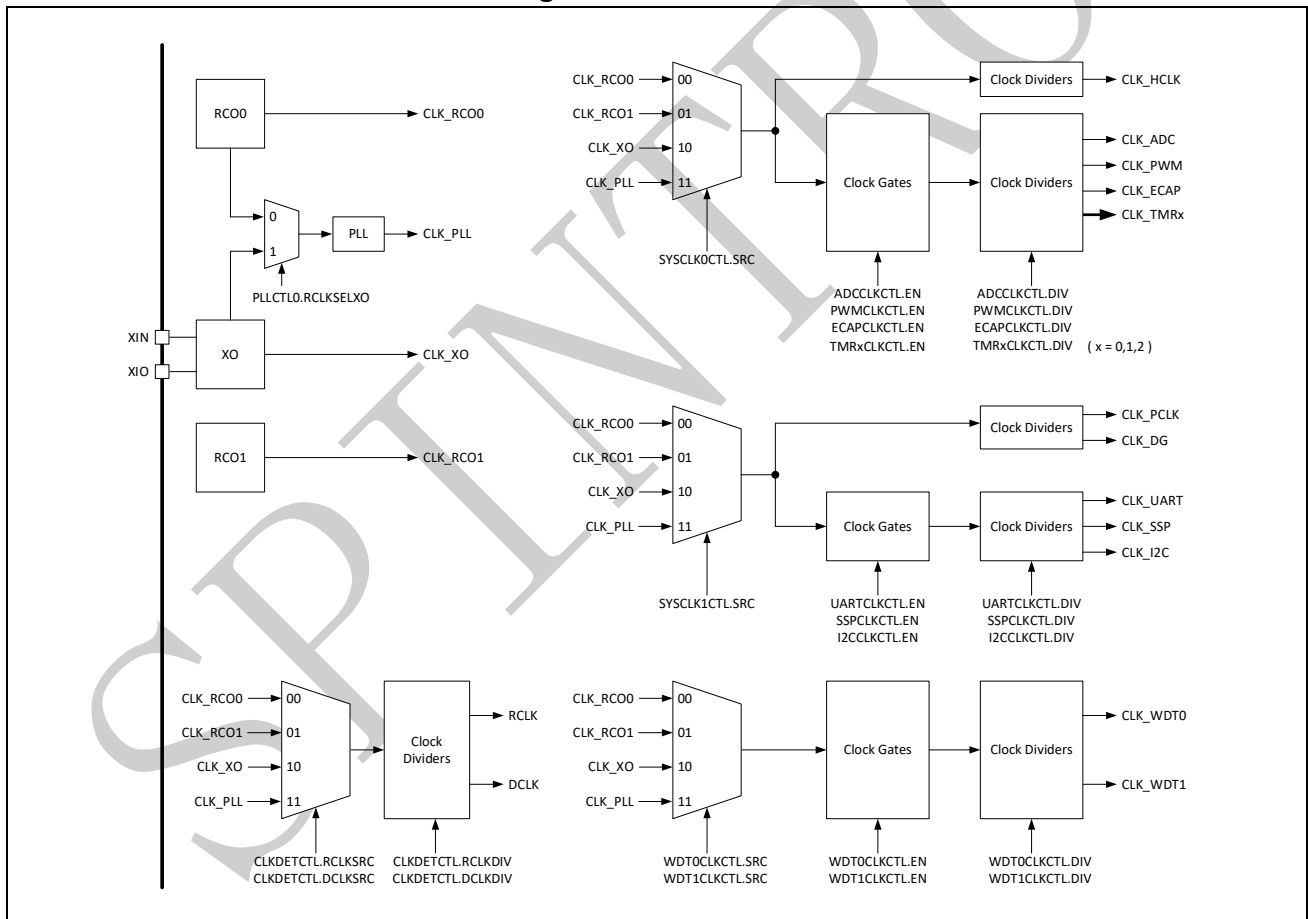

System clock selection is performed on startup. The internal 32 MHz RC oscillator is selected by default upon reset. An external 1 – 66 MHz oscillator can be selected by the user.

The device implements a fractional phase-lock loop (PLL) for high frequency clock generation. The PLL can take the internal RC oscillator or external clock as the input reference clock. The output frequency covers from 25MHz to 200MHz.

Several clock dividers allow the configuration of the AHB, APB and the peripherals frequency. The maximum allowed frequency is 200MHz for AHB and 50 MHz for APB. See [Figure 2-1](#) for details on the clock tree. Special clock selection logic is designed so that the backup clock can take charge if current clock is missing. The 2.2MHz backup-safety oscillator makes the SPD1178 get rid of clock stuck.

2.9 Boot mode

The boot code is located in on-chip ROM memory. After reset, the ARM processor starts code execution from the ROM. The boot pin and TRSTn pin are used to select one of the two boot options:

- Boot from embedded Flash (boot pin = 1, TRSTn pin = X): the boot loader jumps to the embedded Flash and runs from the address at 0x1000 0000
- ISP mode (boot pin = 0, TRSTn pin = 0): the boot loader reprograms the embedded Flash by using UART. During the process, the GPIO34 is configured as UART_TXD and the GPIO35 is configured as UART_RXD.

Note: The Boot pin can be configured for use as GPIO40. In customer applications, it should be used only as an output. During device reset, ensure this pin remains high; otherwise, the device will enter ISP mode.

Whenever the Boot pin is pulled low, the TRSTn pin must also be held low. Failing to do so will cause the chip to enter engineering test mode and malfunction.

2.10 General-purpose IOs (GPIOs)

The SPD1178 can be configured to support as many as 27 multi-purpose GPIO pins. Each GPIO pin can be configured by software as input, as output or as peripheral alternate function. It features:

- Each GPIO pin has configurable internal pull-up and pull-down resistors
- Each GPIO pin has a programmable digital input deglitch filter

2.11 Timers and watchdogs

The SPD1178 device includes three general-purpose timers, two watchdog timers and a SysTick timer.

General-purpose timers

The SPD1178 includes three identical 32-bit general-purpose timers. Each general-purpose timer consists of a 32-bit auto-reload down-counter. An interrupt would be generated when the counter reaches zero if it is enabled. When the counter reaches zero, the timer can also generate an ADCSOC event or a PWMSYNC event if they are enabled. The clock of general-purpose timer can be selected from internal RC oscillators, external oscillator or PLL clock. Besides, each general-purpose timer can also capture external input as timer clock or enable signal.

Watchdogs

The SPD1178 implements two identical watchdogs. Each watchdog is based on a 32-bit down-counter, which can be clocked from internal RC oscillators, external oscillator or PLL clock. When the counter reaches the given time-out value, an interrupt or a reset can be generated. The watchdog counter can be frozen or free-running in debug mode.

SysTick Timer

This timer is dedicated for OS, but could also be used as a standard down-counter. It features:

- A 24-bit down-counter
- Auto-reload capability
- Mask-able system interrupt generation when the counter reaches 0

2.12 UART

The SPD1178 has an UART module that are functionally compatible with the 16550A and 16750 industry standards. It features:

- Ability to add or delete standard asynchronous communication bits (start, stop and parity) in the serial data
- 5 – 8 data bits
- Even, odd or no parity detection
- One, one-and-a-half, or two stop bits generation
- Baud-rate generation up to 12.5 Mbps
- 64-byte transmit FIFO
- 64-byte receive FIFO
- Auto baud-rate detection

2.13 I2C

The I²C bus interface complies with the common I²C protocol. It features:

- Three speeds: Standard mode (100 Kb/s), Fast mode (400 Kb/s) and High-Speed mode (2 Mb/s)
- Clock synchronization
- Master or slave I²C operation
- 7- or 10-bit addressing
- 7- or 10-bit combined format transfers
- 16 x 32-bit deep transmit and receive buffers, respectively

2.14 SPI

The SPI allows half/full-duplex, synchronous, serial communication with external devices. It features:

- Full-duplex synchronous transfers
- Master or slave operation
- 1 to 32-bit transfer frame format selection
- 50 Mbps maximum communication speed
- MSB-first data order
- Programmable clock polarity and phase
- Transmit and receive FIFOs

2.15 ADC

One 14-bit analog-to-digital convert is embedded into SPD1178 and has up to 16 external channels. The temperature sensor, internal powers and PGA outputs can be selected as ADC input channels. These inputs are multiplexed. The ADC core has three independent built-in sample-and-hold (S/H). Each S/H has two input channels, which is suitable for differential sampling.

The events generated by the general-purpose timers and the PWM outputs can be internally connected to the ADC start trigger.

- 14-bit resolution
- 140 ns minimum conversion time and independent configurable sampling time
- Differential sampling
- Triple-sample and hold capability
- Simultaneous sampling and sequential sampling modes supported
- Full range analog input: 0 V to 3.65 V
- Reference voltage can be selected from internal or external
- Input open and short detection for safety

Please see [Table 5-13](#) for ADC characteristics.

2.16 Temperature sensor

The temperature sensor generates a voltage that varies linearly with temperature. It is internally connected to the ADC input channel, which is used to convert the sensor output voltage into a digital value.

2.17 PGAs

Three flexible programmable gain amplifiers (PGAs) are embedded into SPD1178 and shares up to 16 channels. The temperature sensor and internal 1.2V power can be selected as a PGA input channels. These inputs are multiplexed. Each PGA outputs are connected to ADC input channel.

- Programmable gains
Differential mode: 2, 4, 8, 16, 24, 32, 48, 64; Single-ended mode: 1, 2, 4, 8, 12, 16, 24, 32.
- Settling time: 400 ns to 800 ns

Please see [Table 5-14](#) for PGA characteristics.

2.18 Analog comparators

The SPD1178 has ten high-speed comparators. Each comparator uses internal digital-to-analog converter to generate a static voltage, which serves as the threshold of the comparator, but does not guarantee the performance of dynamically changing the code value to generate the waveform.. Two comparators are designed for each PGA: one is monitoring whether the voltage is too high, the other is monitoring whether the voltage is too low. The extra two pairs of comparators are reserved for additional applications. The comparator output is routed to the PWM Trip-Zone modules. Additionally, each comparator can implement the phase comparison for motor commutation. The detail channel selection can be referred to Technical Reference Manual.

- 50 ns typical response
- Programmable hysteresis
- Output with digital deglitch filter
- Phase comparison

Please see [Table 5-16](#) and [Table 5-17](#) for analog comparator and DAC characteristics.

2.19 PWMs

The SPD1178 integrates six PWM modules and supports 12 PWM channels. Without much involvement of processor core, the PWMs can generate complex pulse width waveforms.

Each PWM module supports the following features:

- Dedicated 16-bit time-base counter with period and frequency control
- Each PWM module can generate two outputs with single-edge operation, dual-edge symmetric operation or dual-edge asymmetric operation
- All events can trigger both CPU interrupts and ADC start of conversion
- Programmable phase-control support for lag or lead operation relative to other PWM modules
- Dead-band generation with independent rising and falling edge delay control

- Programmable trip zone allocation of both cycle-by-cycle trip and one-shot trip on fault conditions
- A trip condition can force either high, low, or high-impedance state logic levels at PWM outputs
- Comparator module outputs and trip zone inputs can generate events, filtered events, or trip conditions

2.20 ECAP

The enhanced capture (ECAP) module is essential in systems where accurate timing of external events is important. The SPD1178 has implemented an ECAP module with following features:

- Flexible input capture pin: each GPIO can be configured as capture pin
- 32-bit time base counter
- 4 x 32-bit time-stamp capture registers
- 4-stage sequencer that is synchronized to external events
- Independent edge polarity (rising/falling edge) selection for all 4 events
- Interrupt capabilities on any of the 4 capture events

2.21 Cyclic redundancy check (CRC)

The SPD1178 has a hardware CRC calculation unit. The CRC module is used to verify data transmission or storage integrity. It features:

- 32-bit parallel bit stream input, and up to 32-bit CRC output
- Supports up to 2^{32} byte length for CRC calculation
- Five CRC standard polynomials supported

2.22 Advanced encryption standard (AES) engine

The AES engine provides fast hardware encryption and decryption services. The main features are as follows:

- Supports as many as six block cipher modes: ECB, CBC, CTR, CCM*, MMO, and Bypass
- Supports 128-, 192-, and 256-bits key size
- Error indication for each block cipher mode
- Separate 4 x 32-bit input and output FIFOs

2.23 Serial wire JTAG debug port (SWJ-DP)

The ARM SWJ-DP interface is embedded and is a combined JTAG and serial wire debug port. The SWJ-DP interface enables either a serial wire debug or a JTAG probe to be connected to the target. The debug port can be disabled when enabling SPD1178 certain security feature.


2.24 Pre-Driver system

Pre-driver system consists of two three-phase low- and high-side pre-drivers which drive low- and high-side external power NFET's or IGBT's. The voltage range of each low-side pre-driver is zero to V_{DDG} , which is typically 12V. The embedded charge pump guarantees 100% duty cycle, i.e. allows high-side of each phase to be on indefinitely without loss of charge on the high-side pre-driver stage. Additional features of pre-driver system include hardware-guaranteed input PWM non-overlap, monitoring external high-side power FET's drain-to-source voltage capability and local high-voltage area temperature monitoring.

3 Pinout and pin description

3.1 QFN64

Figure 3-1: SPD1178 QFN64 pin-out

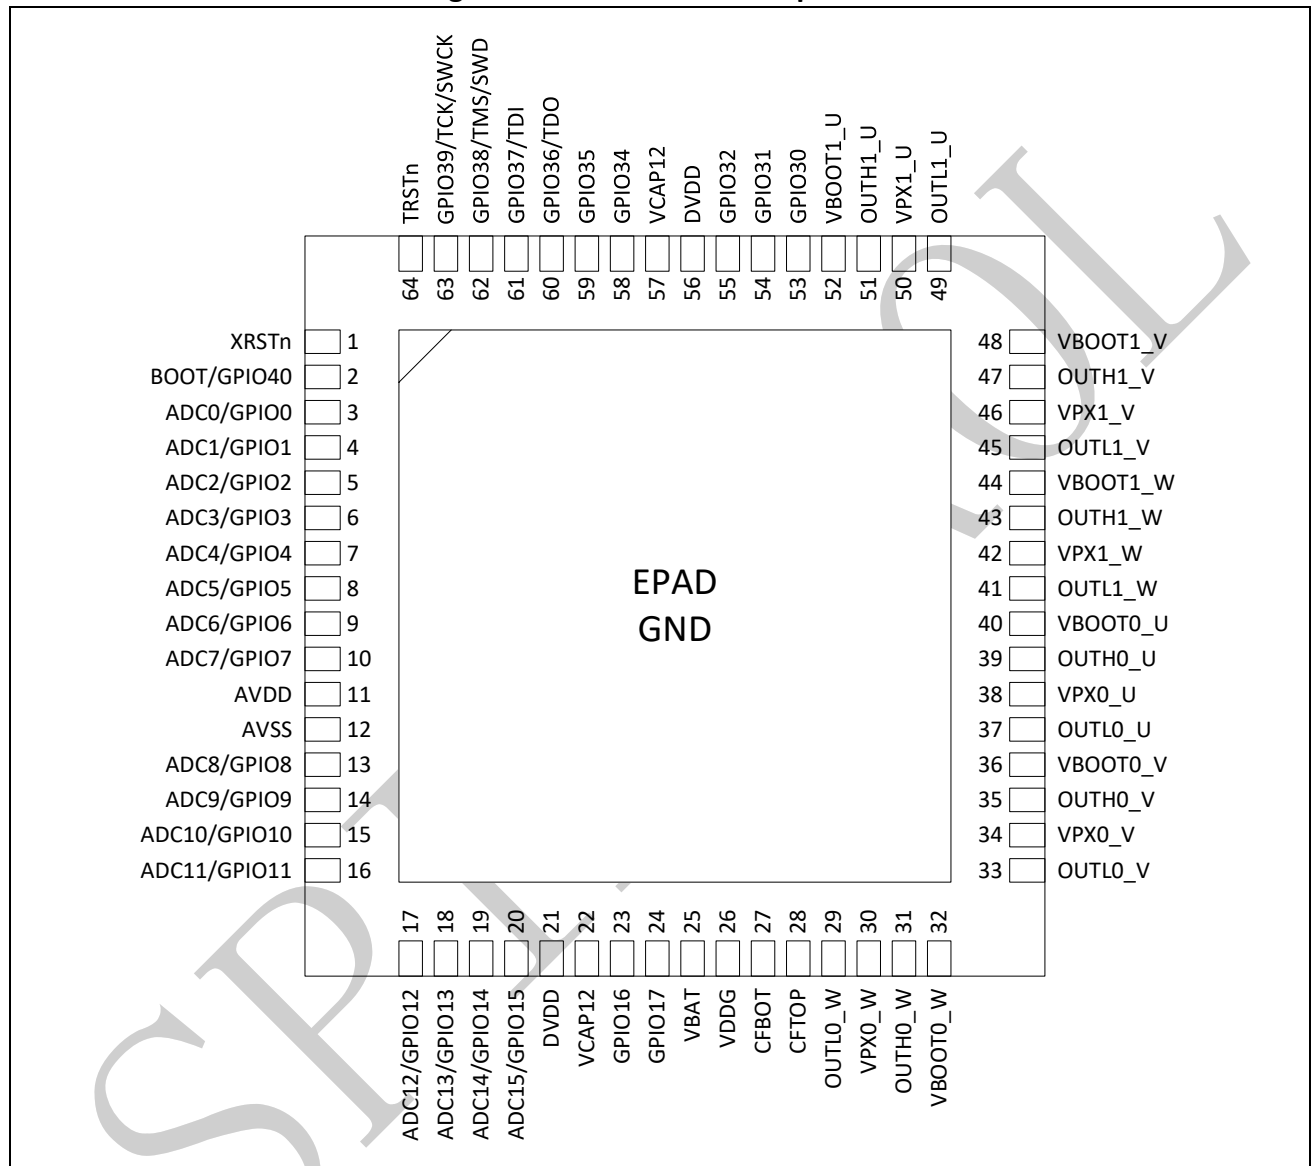

- [1] The above figure shows the package top view.
- [2] Note: there is no need to connect the two VCAP12 pins on the PCB boards.
- [3] Note: when TRSTn is HIGH, GPIO36 ~ GPIO39 pins work as Debug interface and can't be configured as other functions.

Table 3-1: SPD1178 pin definitions

Pin	Signal	Type ^[1]	Description
1	XRSTn	I	Device reset pin, reset the device when low
2	BOOT (GPIO40)	I/O	Boot pin (General-purpose input/output 40)
	SPI_SCLK	I/O	SPI clock input/output
	UART_TXD	O	UART transmit data
	DCLK	O	Clock output from CLKDET module for monitoring
	EPWRTZ00	O	Trip-zone signal 0 from ePower module for monitoring
	EPWRTZ10	O	Trip-zone signal 1 from ePower module for monitoring
3	GPIO0	I/O	General-purpose input/output 0
	ADC0	AI	ADC channel 0 input
	COMP0H	O	Comparator COMP0H result output
4	GPIO1	I/O	General-purpose input/output 1
	ADC1	AI	ADC channel 1 input
	COMP0L	O	Comparator COMP0L result output
5	GPIO2	I/O	General-purpose input/output 2
	ADC2	AI	ADC channel 2 input
	COMP1H	O	Comparator COMP1H result output
6	GPIO3	I/O	General-purpose input/output 3
	ADC3	AI	ADC channel 3 input
	COMP1L	O	Comparator COMP1L result output
7	GPIO4	I/O	General-purpose input/output 4
	ADC4	AI	ADC channel 4 input
	COMP2H	O	Comparator COMP2H result output
8	GPIO5	I/O	General-purpose input/output 5
	ADC5	AI	ADC channel 5 input
	COMP2L	O	Comparator COMP2L result output
9	GPIO6	I/O	General-purpose input/output 6
	ADC6	AI	ADC channel 6 input
10	GPIO7	I/O	General-purpose input/output 7
	ADC7	AI	ADC channel 7 input
11	AVDD	S	Analog power, add 4.7uF and 0.1uF bypass ceramic cap to AVSS
12	AVSS	S	Analog ground
13	GPIO8	I/O	General-purpose input/output 8
	ADC8	AI	ADC channel 8 input
	SPI_SCLK	I/O	SPI clock input/output
	COMP3H	O	Comparator COMP3H result output
	PWMSOC	O	PWM SOC signal output for monitoring
14	GPIO9	I/O	General-purpose input/output 9
	ADC9	AI	ADC channel 9 input
	SPI_SFRM	I/O	SPI frame signal
	COMP3L	O	Comparator COMP3L result output
15	GPIO10	I/O	General-purpose input/output 10

Pin	Signal	Type ^[1]	Description
	ADC10	AI	ADC channel 10 input
	SPI_MOSI	I/O	SPI master output, slave input
	SPI_MISO	I/O	SPI master input, slave output
	COMP4H	O	Comparator COMP4H result output
16	GPIO11	I/O	General-purpose input/output 11
	ADC11	AI	ADC channel 11 input
	SPI_MISO	I/O	SPI master input, slave output
	SPI_MOSI	I/O	SPI master output, slave input
	COMP4L	O	Comparator COMP4L result output
	DCLK	O	Clock output from CLKDET module for monitoring
	EPWRTZO ^[2]	O	Trip-zone signal from ePower module for monitoring
17	GPIO12	I/O	General-purpose input/output 12
	ADC12	AI	ADC channel 12 input
	I2C_SCL	I/O	I ² C clock
18	GPIO13	I/O	General-purpose input/output 13
	ADC13	AI	ADC channel 13 input
	I2C_SDA	I/O	I ² C data
19	GPIO14	I/O	General-purpose input/output 14
	ADC14	AI	ADC channel 14 input
	UART_TXD	O	UART transmit data
	UART_RXD	I	UART receive data
20	GPIO15	I/O	General-purpose input/output 15
	ADC15	AI	ADC channel 15 input
	UART_RXD	I	UART receive data
	UART_TXD	O	UART transmit data
21	DVDD	S	Digital power, add 4.7uF and 0.1uF bypass ceramic cap to GND
22	VCAP12	S	1.2V power, add 2.2uF bypass ceramic cap to GND
23	GPIO16	I/O	General-purpose input/output 16
	XIN	AI	External oscillator input
	UART_TXD	O	UART transmit data
	UART_RXD	I	UART receive data
	PWM2A	O	PWM2 output A
	PWM5A	O	PWM5 output A
24	GPIO17	I/O	General-purpose input/output 17
	XIO	AI/O	External oscillator input/output
	UART_RXD	I	UART receive data
	UART_TXD	O	UART transmit data
	PWM2B	O	PWM2 output B
	PWM5B	O	PWM5 output B
25	VBAT	S	Main Supply Voltage, 7V to 60V, add 2.2uF bypass ceramic cap to GND
26	VDDG	S	VDDG LDO Output, 9V ~ 18V Programmable, add 2.2uF bypass ceramic cap to GND

Pin	Signal	Type ^[1]	Description
27	CFBOT	S	Charge Pump Flying Capacitor Bottom Plate Voltage
28	CFTOP	S	Charge Pump Flying Capacitor Top Plate Voltage
29	OUTLO_W	O	Motor0 W-Phase Low Side FET Gate Drive
30	VPX0_W	O	Motor0 W-Phase Power FET Switching Node
31	OUTH0_W	O	Motor0 W-Phase High Side FET Gate Drive
32	VBOOT0_W	O	Motor0 W-Phase Bootstrap Pin
33	OUTLO_V	O	Motor0 V-Phase Low Side FET Gate Drive
34	VPX0_V	O	Motor0 V-Phase Power FET Switching Node
35	OUTH0_V	O	Motor0 V-Phase High Side FET Gate Drive
36	VBOOT0_V	O	Motor0 V-Phase Bootstrap Pin
37	OUTLO_U	O	Motor0 U-Phase Low Side FET Gate Drive
38	VPX0_U	O	Motor0 U-Phase Power FET Switching Node
39	OUTH0_U	O	Motor0 U-Phase High Side FET Gate Drive
40	VBOOT0_U	O	Motor0 U-Phase Bootstrap Pin
41	OUTL1_W	O	Motor1 W-Phase Low Side FET Gate Drive
42	VPX1_W	O	Motor1 W-Phase Power FET Switching Node
43	OUTH1_W	O	Motor1 W-Phase High Side FET Gate Drive
44	VBOOT1_W	O	Motor1 W-Phase Bootstrap Pin
45	OUTL1_V	O	Motor1 V-Phase Low Side FET Gate Drive
46	VPX1_V	O	Motor1 V-Phase Power FET Switching Node
47	OUTH1_V	O	Motor1 V-Phase High Side FET Gate Drive
48	VBOOT1_V	O	Motor1 V-Phase Bootstrap Pin
49	OUTL1_U	O	Motor1 U-Phase Low Side FET Gate Drive
50	VPX1_U	O	Motor1 U-Phase Power FET Switching Node
51	OUTH1_U	O	Motor1 U-Phase High Side FET Gate Drive
52	VBOOT1_U	O	Motor1 U-Phase Bootstrap Pin
53	GPIO30	I/O	General-purpose input/output 30
	SPI_SCLK	I/O	SPI clock input/output
	I2C_SCL	I/O	I ² C clock
	COMP3H	O	Comparator COMP3H result output
	PWM3A	O	PWM3 output A
	PWM0A	O	PWM0 output A
54	GPIO31	I/O	General-purpose input/output 31
	SPI_SFRM	I/O	SPI frame signal
	I2C_SDA	I/O	I ² C data
	COMP3L	O	Comparator COMP3L result output
	PWM3B	O	PWM3 output B
	PWM0B	O	PWM0 output B
55	GPIO32	I/O	General-purpose input/output 32
	SPI_MOSI	I/O	SPI master output, slave input
	SPI_MISO	I/O	SPI master input, slave output
	COMP4H	O	Comparator COMP4H result output
	PWM4A	O	PWM4 output A

Pin	Signal	Type ^[1]	Description
	EPWRTZ00	O	Trip-zone signal 0 from ePower module for monitoring
56	DVDD	S	Digital power, add 0.1uF bypass ceramic cap to GND
57	VCAP12	S	1.2V power, add 0.1uF bypass ceramic cap to GND
58	GPIO34	I/O	General-purpose input/output 34
	UART_TXD	O	UART transmit data
	UART_RXD	I	UART receive data
	I2C_SDA	I/O	I ² C data
	SPI_MOSI	I/O	SPI master output, slave input
	SPI_MISO	I/O	SPI master input, slave output
59	GPIO35	I/O	General-purpose input/output 35
	UART_RXD	I	UART receive data
	UART_TXD	O	UART transmit data
	I2C_SCL	I/O	I ² C clock
	SPI_MISO	I/O	SPI master input, slave output
	SPI_MOSI	I/O	SPI master output, slave input
60	GPIO36	I/O	General-purpose input/output 36
	TDO	O	JTAG data output
	UART_RXD	I	UART receive data
	SPI_SCLK	I/O	SPI clock input/output
	PWM5A	O	PWM5 output A
	PWM1A	O	PWM1 output A
	I2C_SDA	I/O	I ² C data
Note: when TRSTn is HIGH, this pin always works as TDO and can't be configured as other functions.			
61	GPIO37	I/O	General-purpose input/output 37
	TDI	I	JTAG data input
	UART_TXD	O	UART transmit data
	SPI_SFRM	I/O	SPI frame signal
	PWM5B	O	PWM5 output B
	PWM1B	O	PWM1 output B
	I2C_SCL	I/O	I ² C clock
Note: when TRSTn is HIGH, this pin always works as TDI and can't be configured as other functions.			
62	GPIO38	I/O	General-purpose input/output 38
	TMS/SWD	I/O	JTAG mode select or SWD data
	I2C_SDA	I/O	I ² C data
	SPI_MOSI	I/O	SPI master output, slave input
	SPI_MISO	I/O	SPI master input, slave output
	PWM2A	O	PWM2 output A
Note: when TRSTn is HIGH, this pin always works as TMS/SWD and can't be configured as other functions.			
63	GPIO39	I/O	General-purpose input/output 39
	TCK/SWCK	I	JTAG clock or SWD clock

Pin	Signal	Type ^[1]	Description
	I2C_SCL	I/O	I ² C clock
	SPI_MISO	I/O	SPI master input, slave output
	SPI_MOSI	I/O	SPI master output, slave input
	PWM2B	O	PWM2 output B
	Note: when TRSTn is HIGH, this pin always works as TCK/SWCK and can't be configured as other functions.		
64	TRSTn	I	JTAG reset pin, reset the JTAG when low

[1] I = digital input, O = digital output, AI = analog input, AO = analog out, S = supply.

[2] EPWRTZO signal is logic OR of EPWRTZ00 signal and EPWRTZ10 signal.

[3] All GPIO pins can be configured as ECAP input.

[4] All GPIO pins (except GPIO36 and GPIO37) can be configured as ECAP output.

3.2 PGA input channel selection

For the three on-MCU PGA's, each PGA has two 1-of-8 multiplexers (MUX) for input channel selection, one is for positive input (PGA_x_P, x = 0,1,2) and the other is for negative input (PGA_x_N, x = 0,1,2). The input channel selection table is shown below.

Table 3-2: PGA input channel selection

MUX Value	PGA0_P	PGA0_N	PGA1_P	PGA1_N	PGA2_P	PGA2_N
7	ADC4	ADC3	ADC9	ADC1	ADC14	ADC15
6	ADC10	ADC5	ADC10	ADC11	ADC12	ADC13
5	ADC8	ADC9	ADC8	ADC10	ADC8	ADC11
4	ADC6	ADC7	ADC2	ADC3	ADC4	ADC5
3	ADC0	ADC1	ADC0	ADC2	ADC0	ADC3
2	DAC2	DAC3	ATEST	VDD12	TSEN1 ^[1]	TSEN0 ^[1]
1	DAC1	DAC1	DAC1	DAC1	DAC1	DAC1
0	GND	GND	GND	GND	GND	GND

[1] TSEN0 is output 0 of T-Sensor and TSEN1 is output 1 of T-Sensor.

3.3 GPIO pin function and state after reset

Table 3-3: GPIO pin function and state after reset

Pin Name	Default Function	Default State
GPIO0	ADC0	Floating
GPIO1	ADC1	Floating
GPIO2	ADC2	Floating
GPIO3	ADC3	Floating
GPIO4	ADC4	Floating
GPIO5	ADC5	Floating
GPIO6	ADC6	Floating
GPIO7	ADC7	Floating
GPIO8	ADC8	Floating
GPIO9	ADC9	Floating
GPIO10	ADC10	Floating
GPIO11	ADC11	Floating
GPIO12	ADC12	Floating
GPIO13	ADC13	Floating
GPIO14	ADC14	Floating
GPIO15	ADC15	Floating
GPIO16	GPIO16	Floating
GPIO17	GPIO17	Floating
GPIO18	GPIO18	Floating
GPIO19	GPIO19	Floating
GPIO20	GPIO20	Floating
GPIO21	GPIO21	Floating
GPIO22	GPIO22	Floating
GPIO23	GPIO23	Floating
GPIO24	GPIO24	Floating
GPIO25	GPIO25	Floating
GPIO26	GPIO26	Floating
GPIO27	GPIO27	Floating
GPIO28	GPIO28	Floating
GPIO29	GPIO29	Floating
GPIO30	GPIO30	Floating
GPIO31	GPIO31	Floating
GPIO32	GPIO32	Floating
GPIO33	GPIO33	Floating
GPIO34	GPIO34	Pull up
GPIO35	GPIO35	Pull up
GPIO36	GPIO36	Floating
GPIO37	GPIO37	Floating
GPIO38	GPIO38	Floating
GPIO39	GPIO39	Floating

Pin Name	Default Function	Default State
GPIO40	GPIO40/BOOT	Pull up


- [1] In SPD1178, GPIO18~ GPIO29 are internally connected to the high voltage module, and not bonded out to the external pin.
- [2] In SPD1178, the GPIOs with strikeout are not bonded out to the external pin.

SPINTROL

4 Memory mapping

The memory map of SPD1178 is shown in [Figure 4-1](#).

Figure 4-1: Memory map

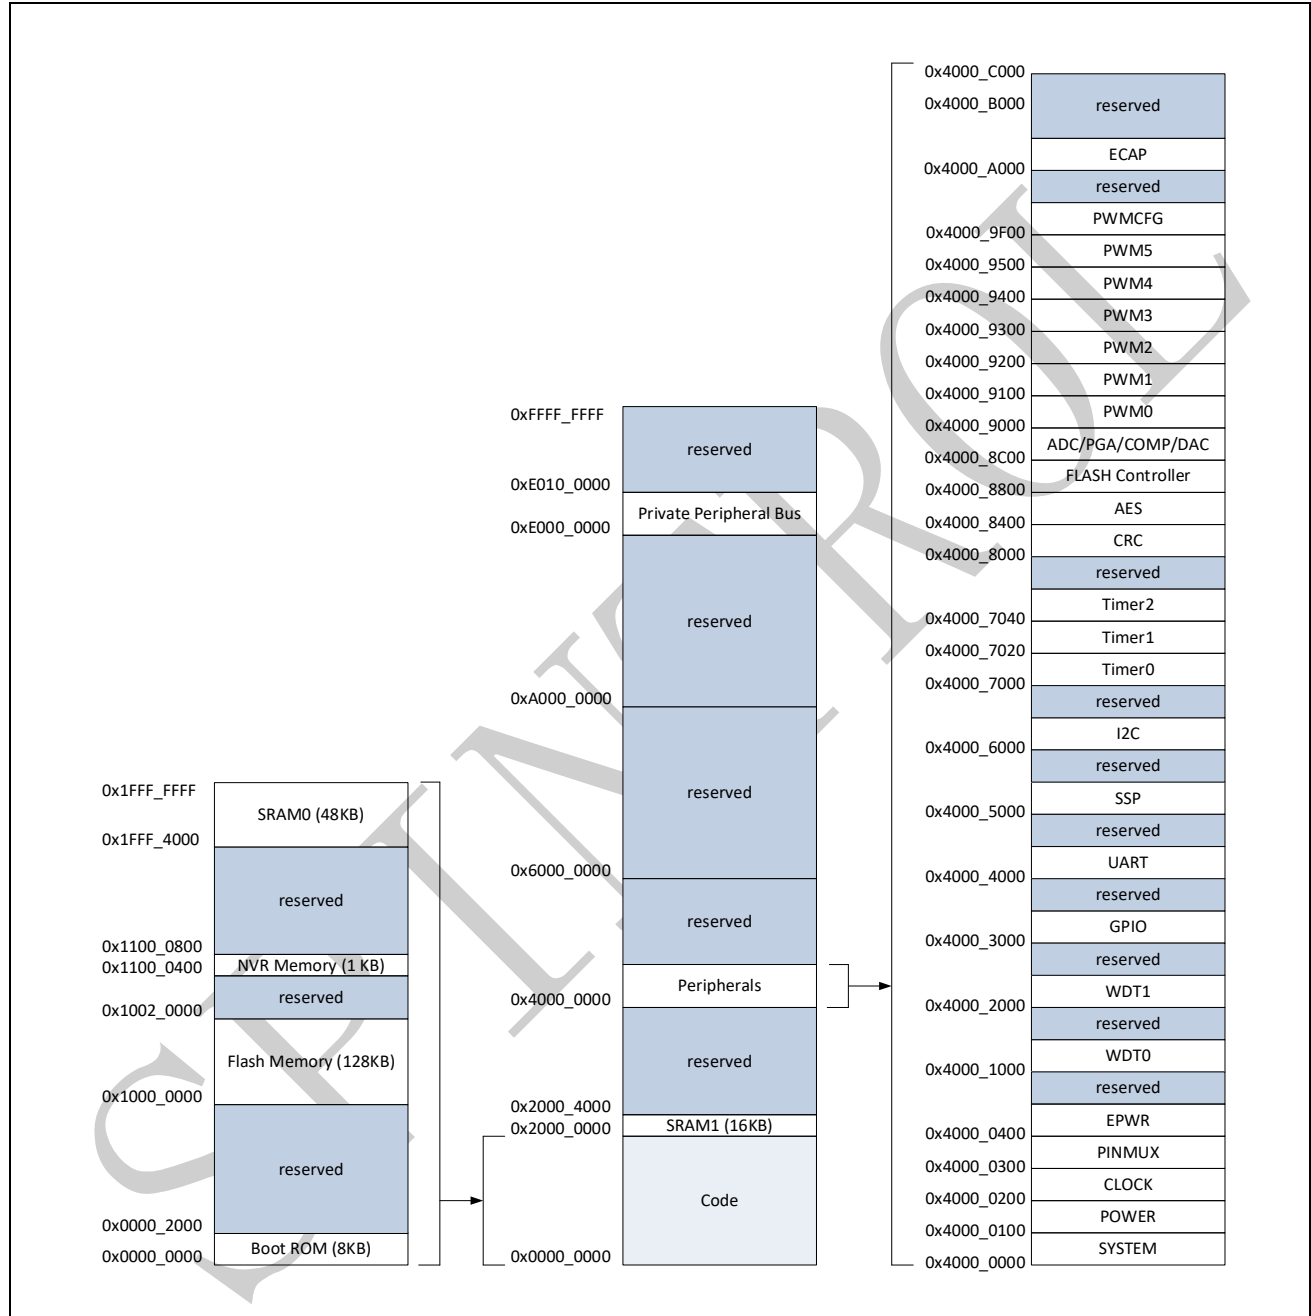

5 Electrical characteristics

5.1 Absolute maximum ratings

Table 5-1: Absolute maximum ratings^{[1][2]}

Symbol	Parameter	Min	Max	Unit
V _{BAT}	Pre-Driver supply voltage, with respect to V _{VSS}	7	60	V
V _{BOOT}	Pre-Driver high-side power supply bootstrap voltage ⁽⁴⁾	–	64	V
V _{VDD}	Supply voltage, with respect to V _{VSS}	-0.3	4.6	V
V _{VDDG}	Pre-driver low-side voltage, with respect to V _{VSS}	-0.3	18	V
V _{VDDA}	Analog voltage, with respect to V _{VSSA}	-0.3	4.6	V
V _{IN}	Input voltage (V _{VDD} = 3.3 V)	-0.3	4.6	V
V _O	Output voltage	-0.3	4.6	V
I _{IC}	Input clamp current	-20	+20	mA
I _{OC}	Output clamp current	-20	+20	mA
T _J	Junction temperature ⁽³⁾	-40	+125	°C
T _A	Ambient temperature ⁽³⁾	-40	+105	°C
T _{stg}	Storage temperature ⁽³⁾	-65	+150	°C

[1] Stresses beyond those listed under absolute maximum ratings may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these is not implied.

[2] All voltage values are with respect to V_{VSS}, unless otherwise noted.

[3] Long-term high-temperature storage or extended use at maximum temperature conditions may result in a reduction of overall device life.

[4] Typically equal to V_{BAT}+V_{VDDG} when high side of pre-driver turned on.

5.2 Recommended operating conditions

Table 5-2: Recommended operating conditions

Symbol	Parameter	Conditions	Min	Nom	Max	Unit
V _{VDD}	Supply voltage	–	2.97	3.3	3.63	V
V _{VSS}	Supply ground	–	–	0	–	V
V _{VDDA}	Analog supply voltage	–	2.97	3.3	3.63	V
V _{VSSA}	Analog ground	–	–	0	–	V
V _{IH}	High-level input voltage	V _{VDD} = 3.3 V	2.0	–	V _{VDD} +0.3	V
V _{IL}	Low-level input voltage	V _{VDD} = 3.3 V	V _{VSS} -0.3	–	0.8	V
T _J	Junction temperature	–	-40	–	+125	°C
T _A	Ambient temperature	–	-40	–	+105	°C

5.3 I/O Electrical characteristics

Table 5-3: I/O Electrical characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{OH}	High-level output voltage	$I_{OH} = I_{OH\ MAX}$	$V_{VDD}-0.4$	—	—	V
V_{OL}	Low-level output voltage	$I_{OL} = I_{OL\ MAX}$	—	—	0.4	V
V_{IH}	High-level input voltage	$V_{VDD} = 3.3\ V$	2.0	—	$V_{VDD}+0.3$	V
V_{IL}	Low-level input voltage	$V_{VDD} = 3.3\ V$	$V_{VSS}-0.3$	—	0.8	V
I_{OH}	High-level output source current when $V_{OH} = V_{OH(MIN)}$	STRENGTH=0 STRENGTH=1 STRENGTH=2 STRENGTH=3	—	—	5 10 15 20	mA
I_{OL}	Low-level output sink current when $V_{OL} = V_{OL(MAX)}$	STRENGTH=0 STRENGTH=1 STRENGTH=2 STRENGTH=3	—	—	5 10 15 20	mA
I_{IL}	Low-level input current (Pin with pull-up and pull-down disabled)	$V_{VDD} = 3.3V$ $V_{IH} = 0\ V$	—	—	2	uA
I_{IH}	High-level input current (Pin with pull-up and pull-down disabled)	$V_{VDD} = 3.3V$ $V_{IH} = V_{VDD}$	—	—	2	uA
R_{PU}	Input pull-up resistor	$V_{IO} = 0\ V$	—	41	—	k Ω
R_{PD}	Input pull-down resistor	$V_{IO} = V_{VDD}$	—	42	—	k Ω

5.4 Power consumption summary

Typical current consumption

In operational mode, the SPD1178 is placed under the following conditions:

- All I/O pins are in input mode and left unconnected;
- All peripherals(including analog module) are enabled;
- All peripheral clocks are as fast as HCLK (frequency division is Zero), except SSP (Max 50 MHz) I2C (Max 50 MHz), PCLK (Max 50 MHz);
- All clock modules are enabled;
- Select PLL clock as system clock source.

In idle mode, the SPD1178 is placed under the following conditions:

- All I/O pins are in input mode and left unconnected;
- All peripherals(including analog module) are clocked off or disabled;
- Clock modules(PLL, RCO0 and XO) are disabled;
- Select RCO1 as system clock source.

In deep sleep mode, the SPD1178 is placed under the following conditions:

- All I/O pins are in input mode and left unconnected;
- All peripherals(including analog module) are clocked off or disabled;
- Clock modules(PLL, RCO1 and XO) are disabled;
- 1.2V LDO is shut down to 0V.

The typical current consumption of SPD1178 measured from V_{DD} is shown in Table 5-4 and Table 5-5. The operational current consumption over various HCLK frequency is shown in Figure 5-1.

Table 5-4: SPD1178 typical current consumption (Run in FLASH, Pre-Driver not included)

Mode	Conditions			Typ	Unit
	f_{HCLK}	f_{PCLK}	f_{PLL}		
Operational ⁽¹⁾	200 MHz ^[2]	50 MHz	200 MHz	67.937	mA
	175 MHz ^[2]	43.75 MHz	175 MHz	64.992	mA
	168 MHz ^[2]	42 MHz	168 MHz	64.006	mA
	150 MHz ^[2]	50 MHz	150 MHz	61.571	mA
	125 MHz ^[2]	41.67 MHz	125 MHz	58.123	mA
	100 MHz	50 MHz	100 MHz	54.551	mA
	75 MHz	37.5 MHz	75 MHz	50.904	mA
	50 MHz	50 MHz	50 MHz	47.389	mA
	32 MHz	32 MHz	32 MHz	44.353	mA
	25 MHz	25 MHz	25 MHz	43.309	mA
Idle	2.2 MHz	2.2 MHz	–	4.081	mA
Deep Sleep	–	–	–	10	uA


[1] Typical values are measured at $T_A = 25\text{ }^{\circ}\text{C}$, $V_{DD} = 3.3\text{ V}$.

Table 5-5: SPD1178 typical current consumption (Run in RAM, Pre-Driver not included)

Mode	Conditions			Typ	Unit
	f_{HCLK}	f_{PCLK}	f_{PLL}		
Operational ⁽¹⁾	200 MHz ^[2]	50 MHz	200 MHz	74.035	mA
	175 MHz ^[2]	43.75 MHz	175 MHz	69.668	mA
	168 MHz ^[2]	42 MHz	168 MHz	68.354	mA
	150 MHz ^[2]	50 MHz	150 MHz	65.493	mA
	125 MHz ^[2]	41.67 MHz	125 MHz	61.061	mA
	100 MHz	50 MHz	100 MHz	56.777	mA
	75 MHz	37.5 MHz	75 MHz	52.305	mA
	50 MHz	50 MHz	50 MHz	48.059	mA
	32 MHz	32 MHz	32 MHz	44.752	mA
	25 MHz	25 MHz	25 MHz	42.883	mA
Idle	2.2 MHz	2.2 MHz	–	4.126	mA

[1] Typical values are measured at $T_A = 25\text{ }^{\circ}\text{C}$, $V_{DD} = 3.3\text{ V}$.

Figure 5-1: Typical operational current versus frequency

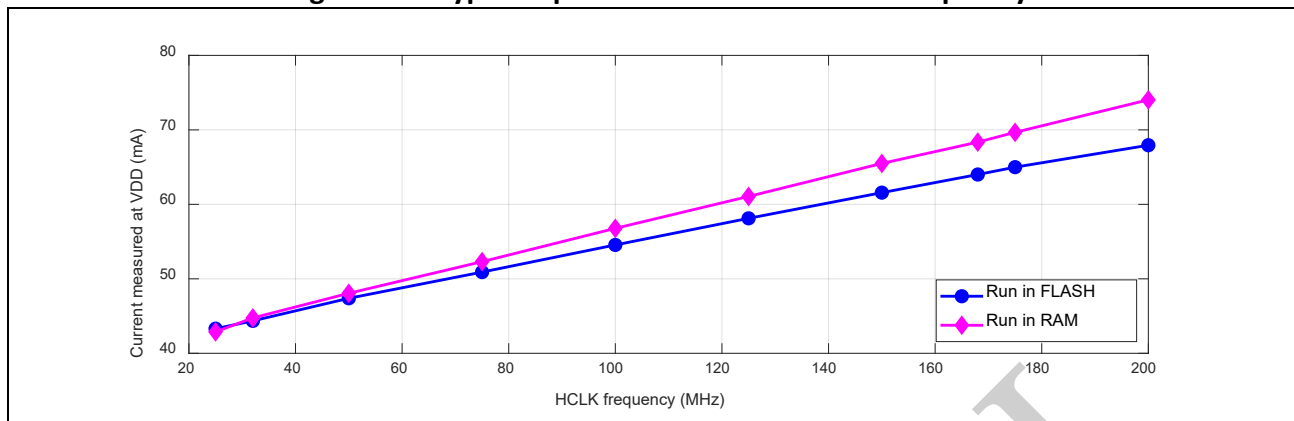

On-chip peripheral current consumption

The current consumption of the on-chip peripherals is given in Table 5-6. The MCU is placed under the following conditions:

- All I/O pins are in input mode and left unconnected;
- All peripherals(including analog module, RCO0 and XO) are disabled unless otherwise mentioned;
- The given value is calculated by measuring the current consumption
 - With all peripherals clocked disabled
 - With only one peripheral enabled

Table 5-6: Peripheral current consumption

Peripherals ^[1]		Conditions	Typ ^[2]	Unit
BOD		Select RCO0 as system clock source; All other peripherals are in default settings; Close PLL, XO, RCO1 and RCO0 after disabling or enabling BOD module	0.1	mA
ADC	Analog ^[3]	Select PLL clock as system clock source; All peripheral clocks are as fast as HCLK; $f_{\text{HCLK}} = 128\text{ MHz}$, $f_{\text{PCLK}} = 32\text{ MHz}$, $f_{\text{PLL}} = 128\text{ MHz}$	16.52	mA
	Digital		0.31	mA
T-Sensor			0.16	mA
PGA ^[4]			4.10	mA
DAC			0.18	mA
Comparator			0.08	mA
UART		UART clock 200MHz, 256000 bps	0.416	mA
I2C		I2C clock 50MHz, 2Mbps	0.316	mA
SSP		SSP clock 50MHz, 50Mbps	0.361	mA
PWM		PWM clock 200MHz	1.471	mA
ECAP		ECAP clock 200MHz	0.329	mA
WDT		WDT clock 200MHz	0.245	mA
TMR		TMR clock 200MHz	0.385	mA
FLASH		HCLK clock 200MHz	0.772	mA
XO		HCLK is from 200MHz PLL, which takes RCO0 as input	0.616	mA

Peripherals ^[1]	Conditions	Typ ^[2]	Unit
RCO	HCLK is from 200MHz PLL, which takes XO as input	0.313	mA
PLL	XO as HCLK source, $f_{PLL} = 32 \text{ MHz}$	1.153	mA

[1] For peripherals with multiple instances, the current quoted is for single modules. For example, the 4.10 mA value quoted for PGA is for one PGA module. So the total 3 PGA module current is 12.30mA.

[2] Typical values are measured at $T_A = 25 \text{ }^\circ\text{C}$, $V_{DD} = 3.3 \text{ V}$.

[3] ADC analog current contain ADC analog module, bandgap and ADC reference buffer.

[4] The Bandgap must be enabled when enabling ADC (Analog Part), T-sensor, PGA, DAC and comparator.

Pre-Driver static current consumption

The Pre-Driver current consumption is measured additionally, shown as [Table 5-7](#).

Table 5-7: Pre-Driver static current consumption

Peripherals	Conditions	Typ	Unit
Pre-Driver	EPWRCTL.EN is 0, VBAT input voltage is 12V.	3	uA
	EPWRCTL.EN is 0, VBAT input voltage is 60V.	19	uA
	EPWRCTL.EN is 1, Pre-Driver power off, VBAT input voltage bigger than 12V.	400	uA
	EPWRCTL.EN is 1, Pre-Driver power up, VBAT input voltage bigger than 12V, Output pin no loading and no toggling.	3300	uA

5.5 Internal 1.2V regulator characteristics

Table 5-8: Internal 1.2V regulator characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{DD}	Power supply	–	2.97	3.3	3.63	V
V_{VCAP12}	Output voltage	Load current = 50mA	1.18	1.20	1.22	V
ΔV_{VCAP12}	Load regulation	$V_{CAP12}(50\text{mA load}) - V_{CAP12}(200\text{mA load})$	–	–	30	mV

Figure 5-2: Internal 1.2V regulator load regulation ($T_A = 25^\circ\text{C}$)


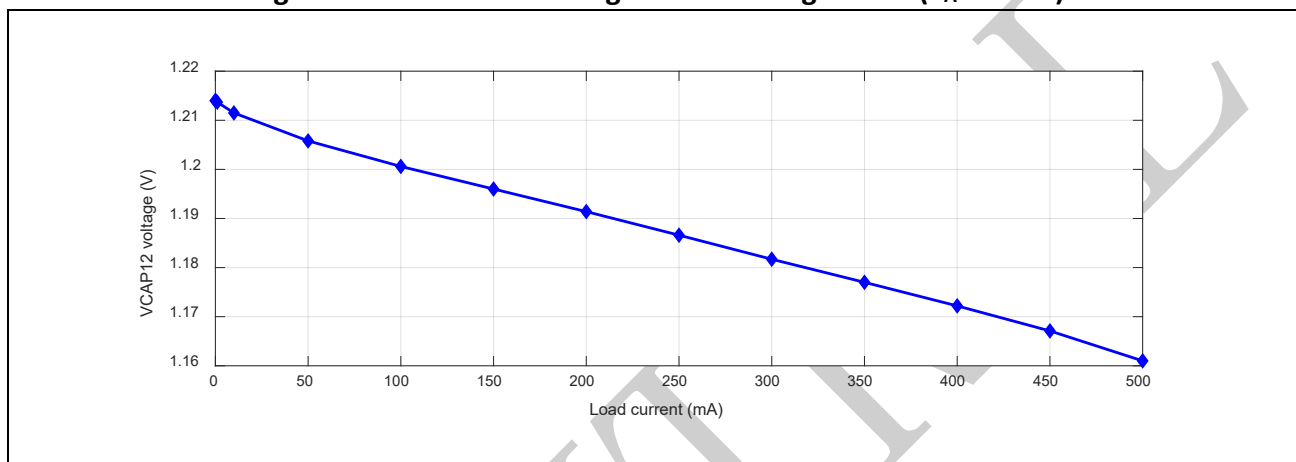


Figure 5-3: Internal 1.2V regulator load regulation with different temperature

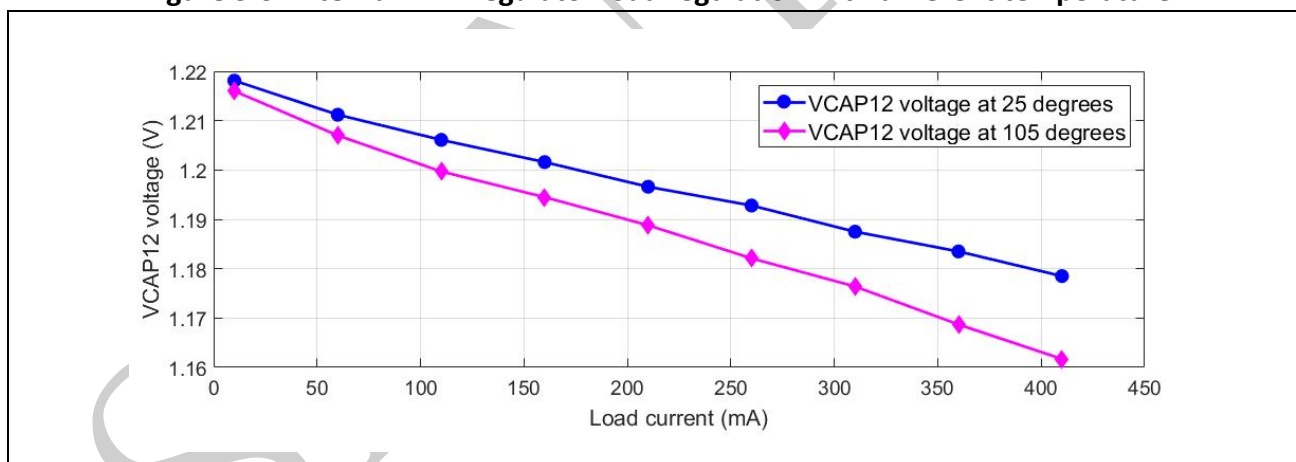

5.6 BOD characteristics

Table 5-9: BOD characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{VDDA}	Power supply	—	2.97	3.3	3.63	V
V _{VDD33H_Asset}	VDD33 too high assert threshold	—	—	3.42	—	V
V _{VDD33H_Deasset}	VDD33 too high de-assert threshold	—	—	3.31	—	V
V _{VDD33L_Asset}	VDD33 too low assert threshold	—	—	2.58	—	V
V _{VDD33L_Deasset}	VDD33 too low de-assert threshold	—	—	2.65	—	V
V _{VDD12H_Asset}	VDD12 too high assert threshold	—	—	1.33	—	V
V _{VDD12H_Deasset}	VDD12 too high de-assert threshold	—	—	1.31	—	V
V _{VDD12L_Asset}	VDD12 too low assert threshold ^[1]	—	—	0.94	—	V
V _{VDD12L_Deasset}	VDD12 too low de-assert threshold ^[1]	—	—	0.97	—	V

[1] The characteristics of VDD12 too low 0 and VDD12 too low 1 are the same.

5.7 RCO characteristics

Table 5-10: RCO characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{VDDA}	Power supply	—	2.97	3.3	3.63	V
f _{RCO}	RCO frequency	T _J = 25 °C	—	32	—	MHz
ACC _{RCO}	RCO frequency accuracy (f _{RCO} variation versus temperature)	T _J = -40~125 °C	-1	—	1	%

5.8 PLL characteristics

Table 5-11: PLL characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{VDDA}	Power supply	—	2.97	3.3	3.63	V
f _{VCO}	VCO frequency	—	400	500	600	MHz
f _{pfd}	Phase-Frequency Detector (PFD) input frequency	—	4	—	8	MHz
t _{LOCK}	Locking time	—	—	—	15	us

5.9 XO characteristics

Table 5-12: XO characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{VDDA}	Power supply	—	2.97	3.3	3.63	V
F _{XO}	XO frequency	—	1	—	66	MHz

The negative resistance of the on-chip crystal oscillator at different temperature is shown in [Figure 5-4](#) ~ [Figure 5-7](#). The loading capacitor CL_eff is defined as equivalent capacitance seen by the on-chip crystal.

Figure 5-4: The negative resistance of the on-chip crystal oscillator at 50°C

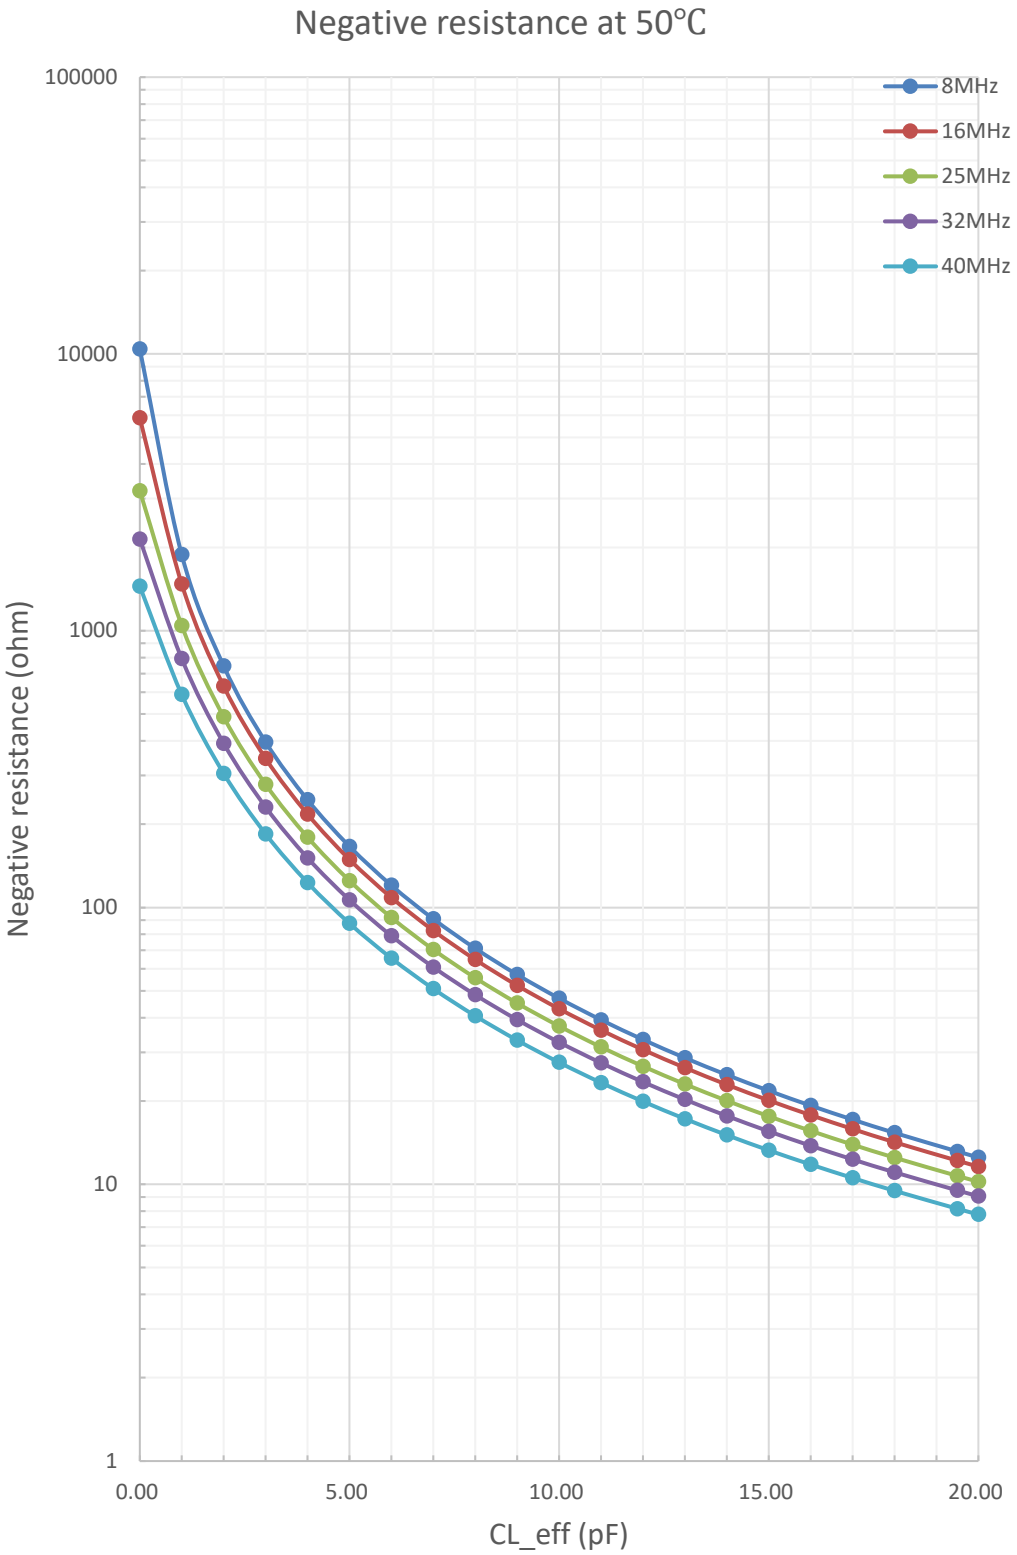


Figure 5-5: The negative resistance of the on-chip crystal oscillator at 85°C

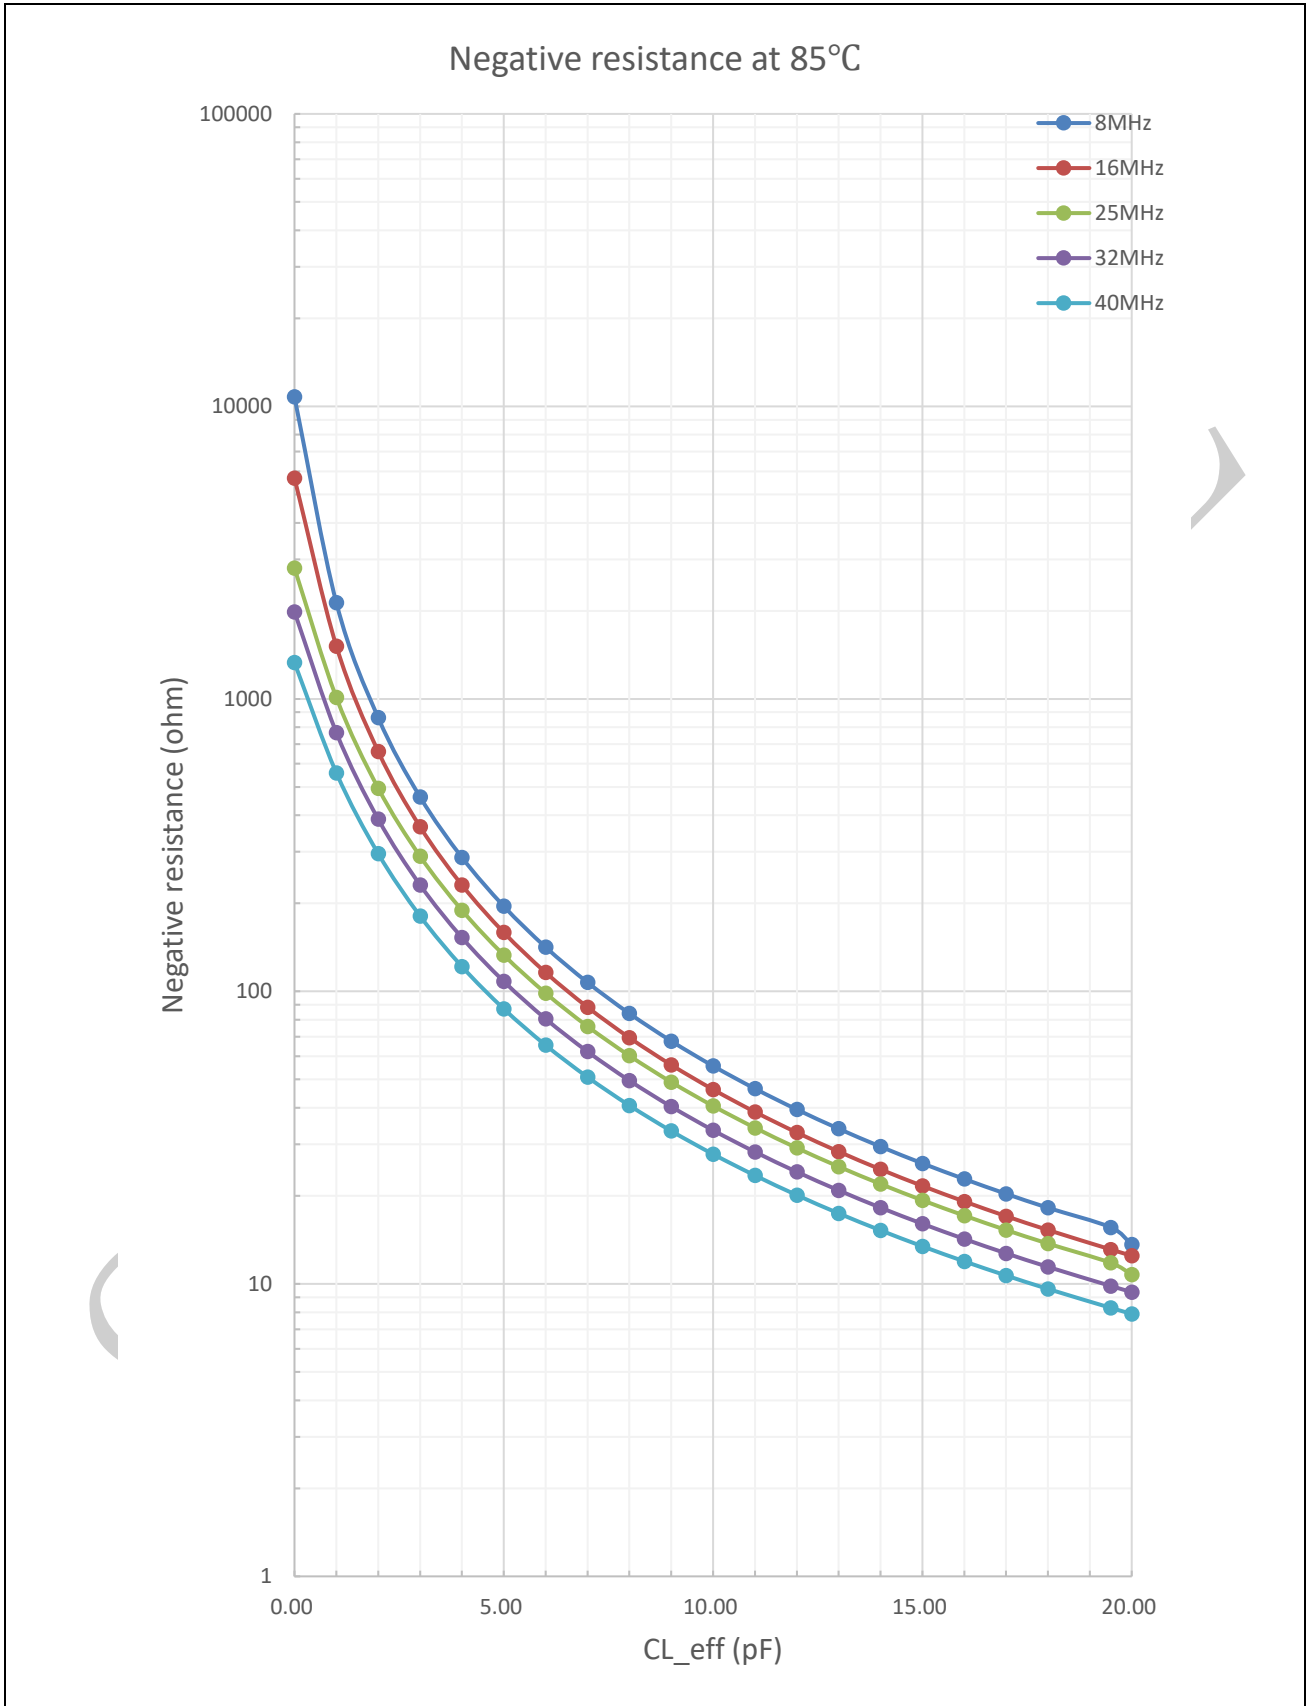


Figure 5-6: The negative resistance of the on-chip crystal oscillator at 100°C


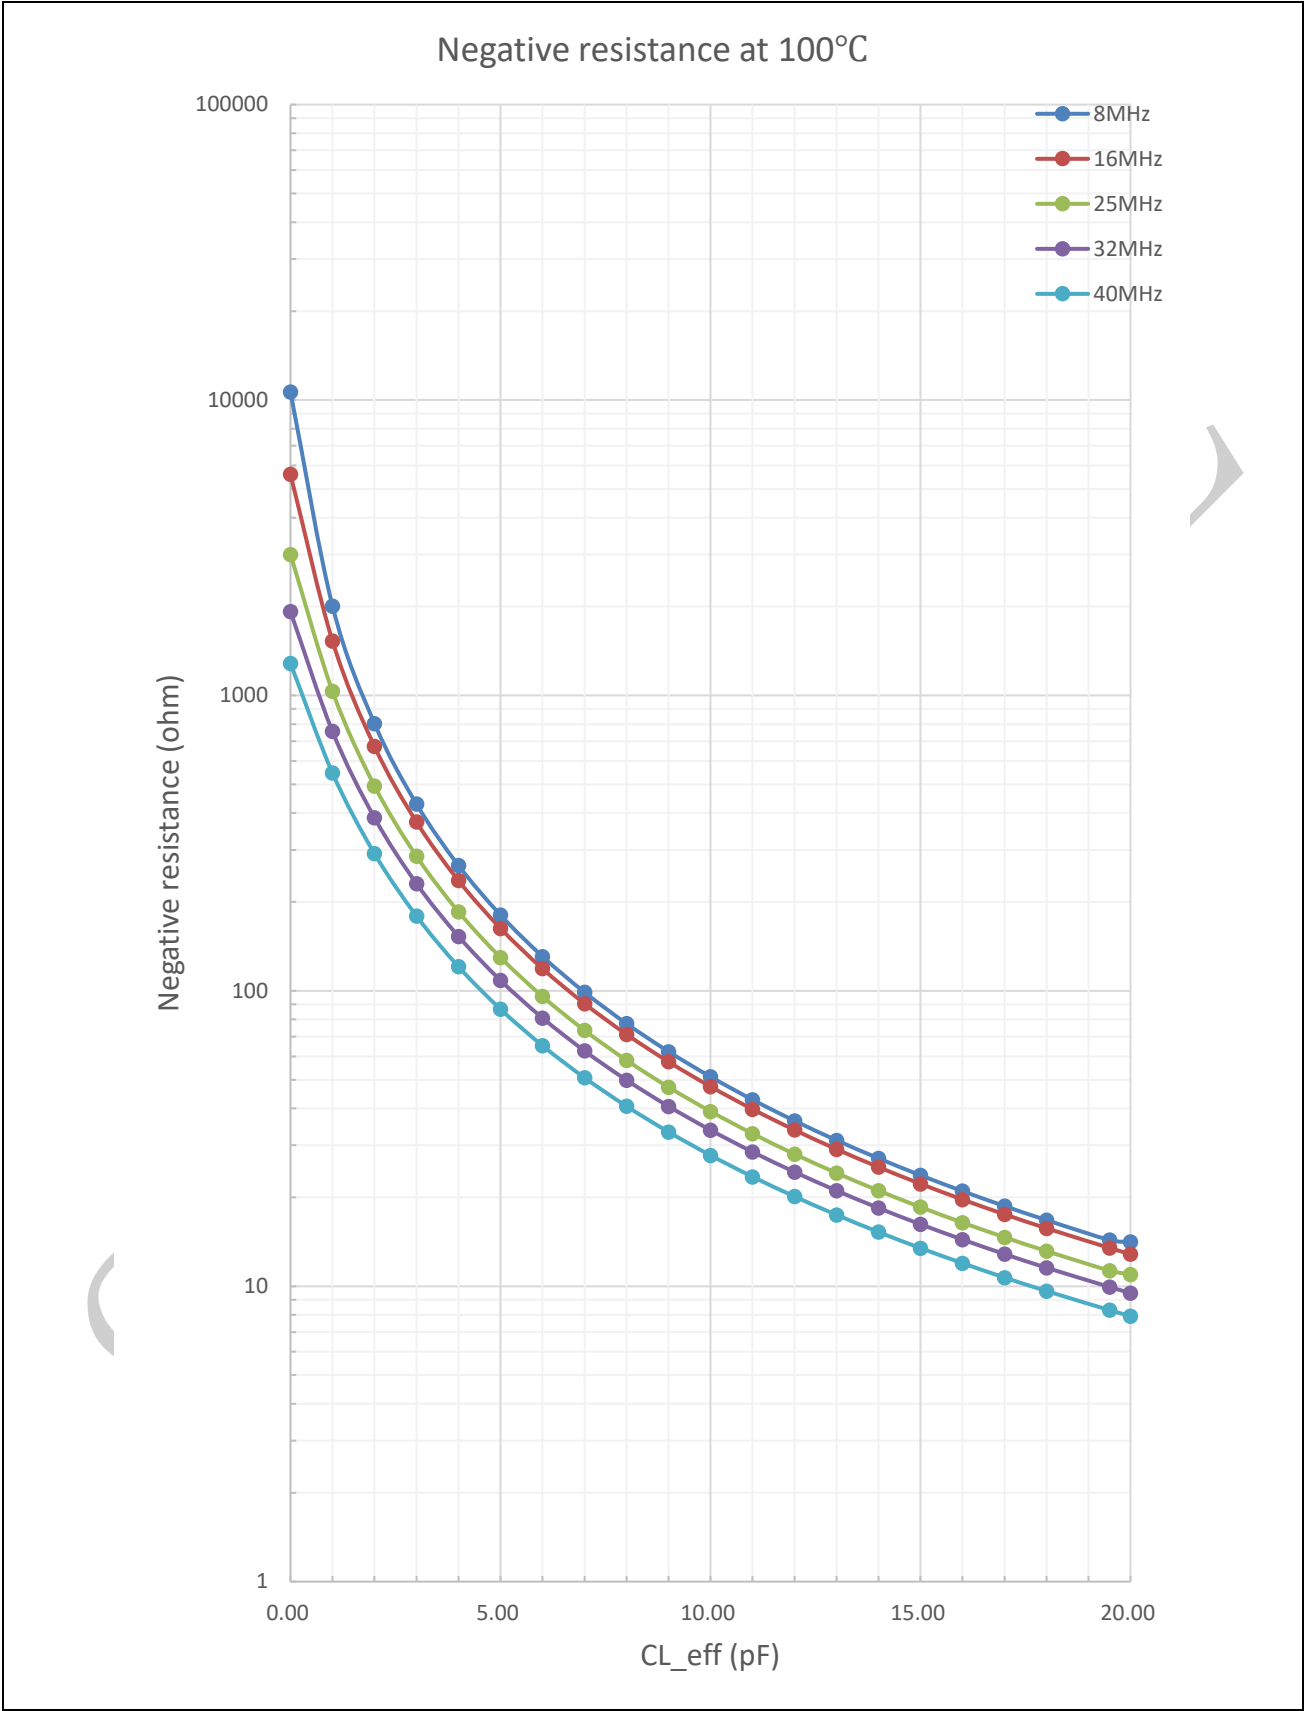


Figure 5-7: The negative resistance of the on-chip crystal oscillator at 125°C

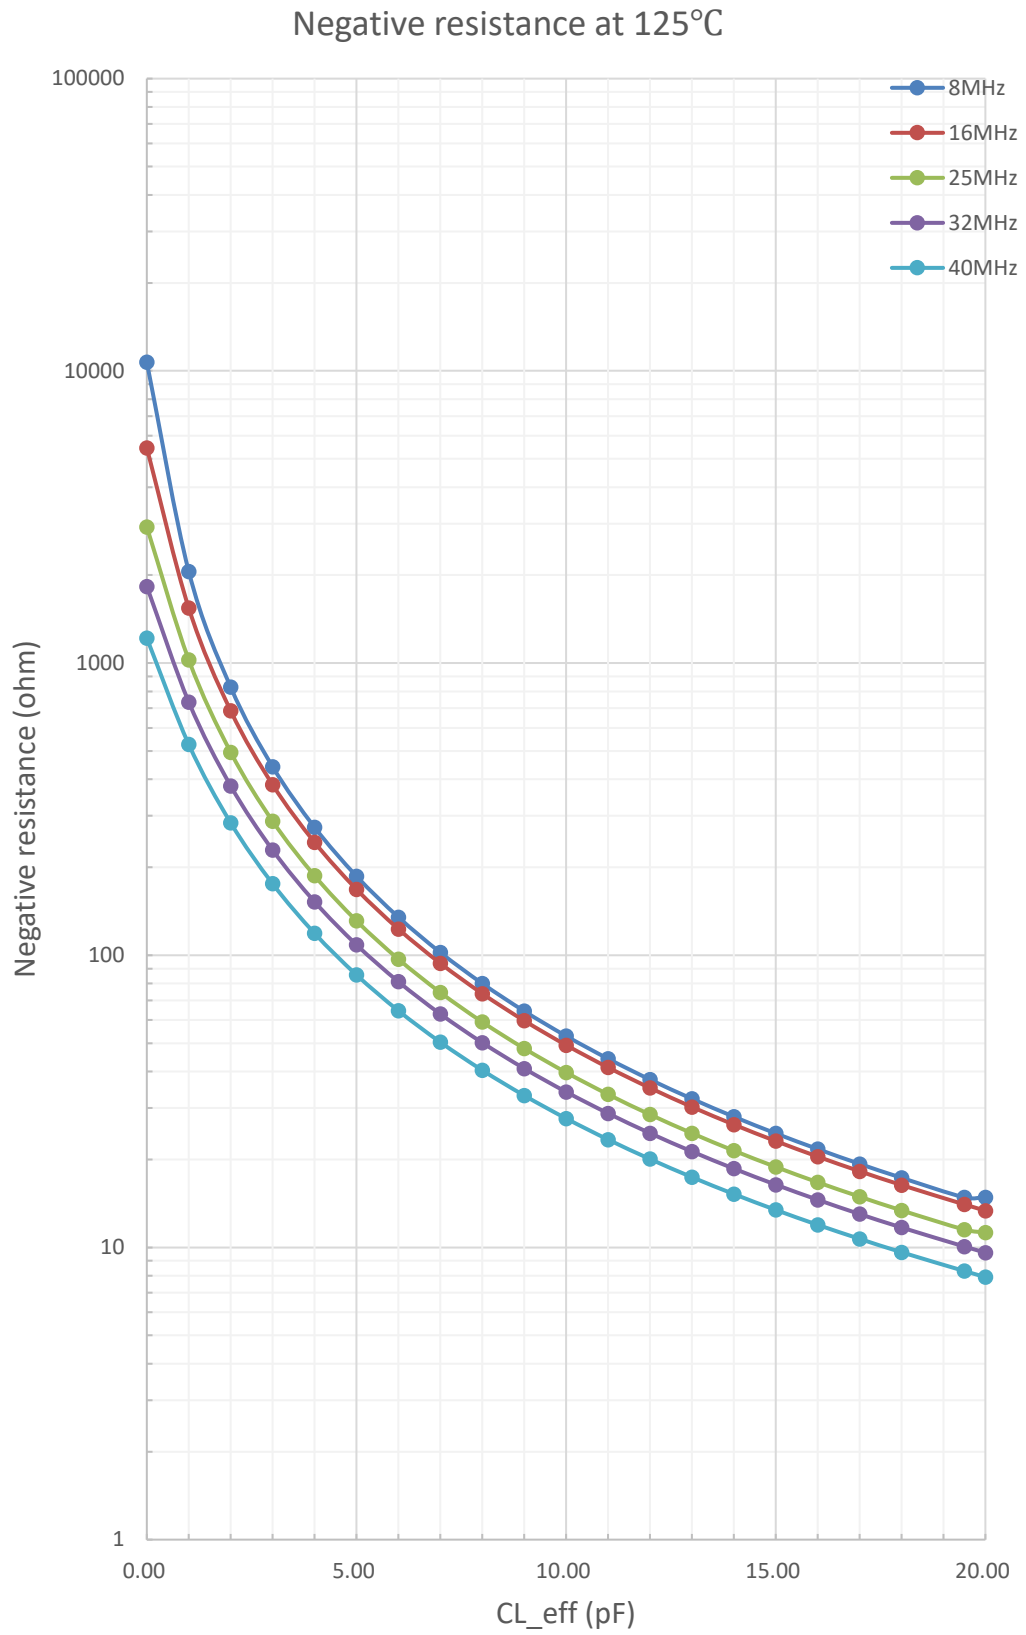

5.10 14-bit ADC characteristics

Table 5-13: ADC characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{VDDA}	Power supply	—	2.97	3.3	3.63	V
N_R	Resolution	No missing code. Monotonic	14	—	—	bit
F_S	Conversion speed ^[1]	—	—	—	4	MSPS
V_{AIN}	Input voltage range	—	0	—	V_{VDDA}	V
V_{REF}	Reference voltage	—	1.194	1.2	1.206	V
I_{PAD}	Operational current	$V_{VDDA} = 3.3\text{ V}$	—	17.1	21	mA
INL	Integral linearity error	—	-3.0	—	3.0	LSB
DNL	Differential linearity	—	-1.0	—	1.0	LSB
E_{OFF}	Offset error ^[2]	With calibration	-2	—	2	LSB
E_{GAIN}	Gain error ^[2]	With calibration	-4	—	4	LSB
E_{OFF2}	Channel to channel offset	—	-3	—	3	LSB
E_{GAIN2}	Channel to channel gain error	—	-5	—	5	LSB
T_{COEF}	ADC temperature coefficient with internal reference	—	—	26	—	ppm/°C
T_{PWRUP}	Power-up time	—	—	—	200	us
$ENOB_{DC}$	DC Noise Floor	—	—	12.0	—	bits
SNR	Signal-to-noise ratio	$f_{in} = 100\text{kHz}$ $Amp = 0.94F_S$ $N = 8192$	—	75.5	—	dB
THD	Total harmonic distortion		—	-85.0	—	dB
ENOB	Effective number of bits		—	12.2	—	bits
SFDR	Spurious free dynamic range		—	86.0	—	dB
T_{SLOPE}	Degrees C of temperature movement per measure ADC LSB change of the temperature sensor	—	—	1.904 ^[3]	—	°C/LSB
T_{OFFSET}	ADC output at 25 °C of the temperature sensor	—	—	162.138	—	LSB

[1] Sampling time = 110ns, conversion time = 140ns

[2] Offset and gain can be calibrated automatically by HW.

[3] Can be reduced to 0.24 °C/LSB by PGA.

5.11 PGA characteristics

Table 5-14: PGA characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{VDDA}	Power supply	—	2.97	3.3	3.63	V
V _{AIN}	Input voltage range	—	0	—	V _{VDDA}	V
V _{OUT}	Output voltage range	—	0.3	—	V _{VDDA} -0.3	V
R _{IN}	Input impedance	—	—	10	—	MΩ
G	Gain	Single-ended mode	1, 2, 4, 8, 12, 16, 24, 32			—
		Differential mode	2, 4, 8, 16, 24, 32, 48, 64			—
E _{GAIN}	Gain error	Differential Gain = 2	-0.5	—	0.5	%
		Differential Gain = 64	-3	—	3	%
V _{OS}	Offset	—	-5	—	5	mV
T _{OFFSET}	Offset temperature drift	—	—	5	—	μV/°C
SR	Slew rate	Single mode and Loading is ADC sampling capacitor	—	20	—	V/μs
		Differential mode and Loading is ADC sampling capacitor	—	40	—	V/μs
GBW	Gain band width	Single gain = 1	—	40	—	MHz
		Single gain = 8	—	6.8	—	MHz
		Single gain = 32	—	1.7	—	MHz
		Differential gain = 2	—	20	—	MHz
		Differential gain = 16	—	3.4	—	MHz
		Differential gain = 64	—	0.8	—	MHz
t _{SETTLE}	Settle time	Differential gain = 2	—	170 ^[1]	220	ns
		Differential gain = 16	—	400	600	ns
		Differential gain = 64	—	1600	2200	ns
SNR	Signal-to-noise ratio	Differential gain = 2 f _{in} = 10kHz Amp = 0.94F _s N = 8192	—	74.0	—	dB
THD	Total harmonic distortion		—	-78.0	—	dB
ENOB	Effective number of bits		—	11.6	—	bit
SFDR	Spurious free dynamic range		—	82.0	—	dB
SNR	Signal-to-noise ratio	Differential gain = 64 f _{in} = 10kHz Amp = 0.94F _s N = 8192	—	58.0	—	dB
THD	Total harmonic distortion		—	-80.0	—	dB
ENOB	Effective number of bits		—	9.4	—	bit
SFDR	Spurious free dynamic range		—	63.0	—	dB
I	Current consumption	Only one PGA	—	4.16	5.20	mA

[1] Settle time is measured by step input, and differential output change from -2.7V to 2.7V (V_{VDDA}=3.3V), the time for output to be settled with 1LSB (446μV), guarantee by design.

5.12 Analog comparator characteristics

Table 5-15: Comparator characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{VDDA}	Power supply	—	2.97	3.3	3.63	V
V_{OFFSET}	Offset voltage (Hysteresis voltage=0)	Common mode input voltage = 1.65V	-10	—	10	mV
V_{HYST}	Hysteresis voltage(12mV)	—	—	13	—	mV
	Hysteresis voltage(24mV)	—	—	26	—	mV
	Hysteresis voltage(36mV)	—	—	42	—	mV
t_D	Delay time – comparator response time to PWM shunt down (Asynchronous)	—	—	50	—	ns

5.13 Internal 10-bit DAC characteristics

Table 5-16: DAC characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V_{VDDA}	Power supply	—	2.97	3.3	3.63	V
N	resolution	Monotonic	10	—	—	bit
V_{FS}	Full scale value	—	0	—	V_{DDA}	V
DNL	Differential linearity	—	-0.5	—	0.5	LSB
INL	Integral linearity	—	-1	—	1	LSB
E_{OFF}	Offset error	—	—	5	—	mV
t_{SETTLE}	DAC settling time	Design guarantee	—	—	1	us


- [1] The DAC is used to generate a static voltage as the threshold of the comparator and does not guarantee the performance of dynamically changing the code value to generate the waveform.

5.14 DAC buffer characteristics

Table 5-17: DAC buffer characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
V _{VDDA}	Power supply	—	2.97	3.3	3.63	V
V _{OUT}	Output voltage range	—	0.3	—	V _{VDDA} -0.3	V
t _{SETTLE}	Settling time	Design guarantee	—	1	—	us
E _{OFF}	Offset error	—	—	3	—	mV
C _L	Capacitor load	—	—	—	50	pF
R _L	Resistor load	—	1	—	—	MΩ

Figure 5-8: DAC buffer offset over Input voltage

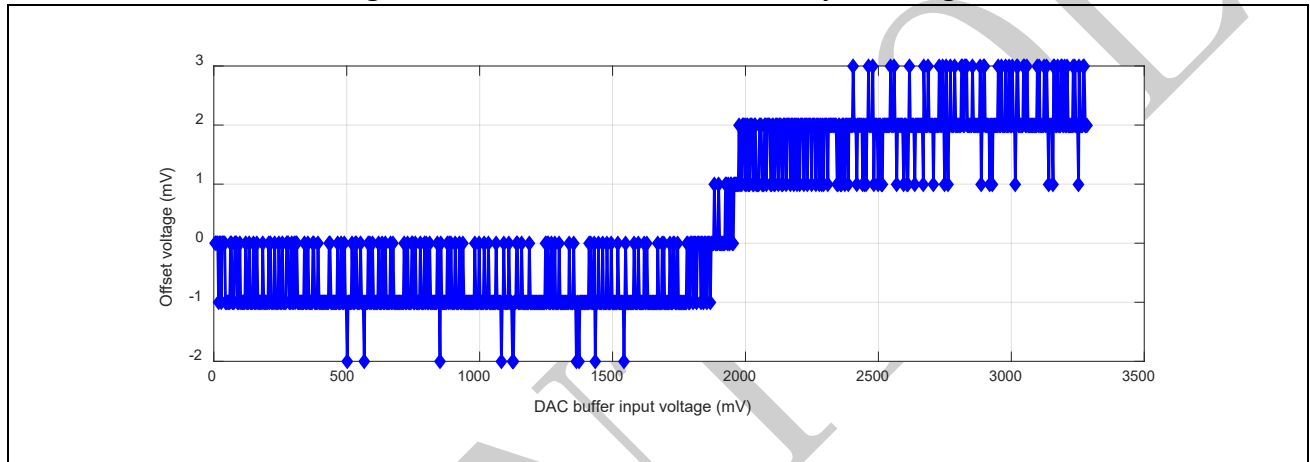

5.15 Flash memory characteristics

The characteristics are given at T_J = -40 to 125 °C unless otherwise specified.

Table 5-18: Flash memory characteristics

Symbol	Parameter	Conditions	Min	Max	Unit
t _{RD}	Read access time	—	40	—	ns
t _{PROG}	Word (32-bit) program time	—	8	10	us
t _{SE}	Sector erase time	—	0.8	4	ms
t _{CE}	Chip erase time	—	8	10	ms
N _{END}	Endurance (erase/program cycle)	T _J = 85 °C	100,000	—	cycles
t _{RET}	Data retention duration	T _J = 85 °C	10	—	years

5.16 Electrical sensitivity characteristics

Table 5-19: ESD absolute maximum ratings

Symbol	Parameter	Conditions	Max	Unit
$V_{ESD(HBM)}$	Electrostatic discharge voltage (Human Body Model)	Ambient temperature $T_A = 25\text{ }^{\circ}\text{C}$	1000	V
$V_{ESD(CDM)}$	Electrostatic discharge voltage (Charge Device Model)	Ambient temperature $T_A = 25\text{ }^{\circ}\text{C}$	500	V
		Corner Pin	750	V

Table 5-20: Electrical sensitivities

Symbol	Parameter	Conditions	Max	Unit
LU	Static latch-up	Ambient temperature $T_A = 85\text{ }^{\circ}\text{C}$ $V_{DD} = 3.63\text{V}$, $V_{CAP12} = 1.32\text{V}$	100	mA

5.17 Moisture sensitivity characteristics

Table 5-21: Moisture sensitivity characteristic

Symbol	Parameter	Conditions	Level	Unit
MSL	Moisture sensitivity level	—	Level 3	—

5.18 Thermal resistance characteristics

Table 5-22: Thermal resistance characteristics (QFN64 package)

Symbol	Parameter	Conditions	Typ	Unit
θ_{JC}	Junction-to-case thermal resistance	—	6.097	$^{\circ}\text{C/W}$
θ_{JA}	Junction-to-ambient thermal resistance	4-layer PCB PCB Copper content Top layer = 20%, Second/Third layer = 100%, Bottom layer = 5%	29.7742	$^{\circ}\text{C/W}$

[1] The size of PCB test board is 76.2mm x 114.3mm x 1.6mm.

5.19 SPI characteristics

Table 5-23: SPI characteristics

Symbol	Parameter	Conditions	Min	Typ	Max	Unit
f_{SCLK}	SCLK clock frequency	—	—	—	50	MHz
$t_{\text{SCLK(H)}}$	SCLK clock high time	—	10	—	—	ns
$t_{\text{SCLK(L)}}$	SCLK clock low time	—	10	—	—	ns
SPI master mode						
$t_{\text{V(MO)}}$	Data output valid time	—	—	—	9.5	ns
$t_{\text{H(MO)}}$	Data output hold time	—	3.9	—	—	ns
$t_{\text{SU(MI)}}$	Data input setup time	—	6	—	—	ns
$t_{\text{H(MI)}}$	Data input hold time	—	2	—	—	ns
SPI slave mode						
$t_{\text{SU(SFRM)}}$	SFRM enable setup time	—	5.6	—	—	ns
$t_{\text{H(SFRM)}}$	SFRM enable hold time	—	1.5	—	—	ns
$t_{\text{A(SO)}}$	Data output access time	—	4	—	10	ns
$t_{\text{DIS(SO)}}$	Data output disable time	—	4	—	10	ns
$t_{\text{V(SO)}}$	Data output valid time	—	—	—	9.5	ns
$t_{\text{H(SO)}}$	Data output hold time	—	3.9	—	—	ns
$t_{\text{SU(SI)}}$	Data input setup time	—	6	—	—	ns
$t_{\text{H(SI)}}$	Data input hold time	—	2	—	—	ns

5.20 Pre-Driver characteristics

Table 5-24: Pre-Driver characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
D_{MAX}	Maximum supported duty cycle	Charge pump will replenish bootstrap capacitor when high side is turned on	–	100	–	%
t_{DL}	Low-side propagation delay	1nF Capacitor as load	–	70	100	ns
t_{DH}	High-side propagation delay	1nF Capacitor as load	–	80	112	ns
Δt	High/Low side delay mismatch	–	–	–	4	ns
t_r	Rise time	1nF Capacitor as load	–	15	–	ns
t_f	Fall time	1nF Capacitor as load	–	10	–	ns
VPX_{MIN}	High side return ground Minimum	Min voltage where high side signal still propagate	-10	–	–	V
I_{Source_Max}	Pre-Driver Max sourcing capability	–	–	1	–	A
I_{Sink_Max}	Pre-Driver Max sinking capability	–	–	1.3	–	A

5.21 12V linear regulator characteristics

Table 5-25: 12V linear regulator characteristics


Symbol	Parameter	Test Condition	Min	Typ	Max	Unit
V_{VDDG}	Pre-Driver low-side gate voltage	9V, 10V, 12V, 15V, 18V programmable	11.4	12	12.6	V
I_{VDDG_Limit}	LDO current limit	–	–	100	–	mA

[1] V_{VDDG} can't exceed V_{BAT} . In general, V_{VDDG} value is minimum of programmable value or V_{BAT} .

6 PCB layout guidance for Pre-Driver

- Co-locate power FET pairs with drain of low-side adjacent to source of high-side to minimize both L_{sh} and L_{dl} , and pairs placed close to each other to reduce routing distance and minimize L_r and L_d .
- Use thick, direct tracks between FET's with no loops or deviation.
- Minimize the areas of major current paths shown by arrows in the diagram of Figure 6-1 to avoid any loops.
- Avoid interconnect vias as they add significant inductance.
- In case of standing power FET's, reduce the effect of lead inductances by lowering package height above PCB.
- Connect the other end of C_0 (shown in Figure 6-1) as close as possible to the drain of high-side FET, in order to provide the lowest-parasitic return path for current.
- Place pre-driver IC closer to power switches; route gate driver control signals OUTH and OUTL, and high- and low-side return grounds VPX and GND with straight as-short-as-possible traces.
- Connect bootstrap capacitor as close as possible to VPX and VBOOT pins.
- Connect low-ESR bypass capacitors from VBAT, VDDG and other power pins to ground, placing capacitors as close as possible to their respective pins, with the other end of each capacitor having a strong connection to board ground.
- Use power FET's with fast body diode turn-on times and as small as possible diode reverse charges.

Figure 6-1: Simplified Pre-Driver Board Schematic

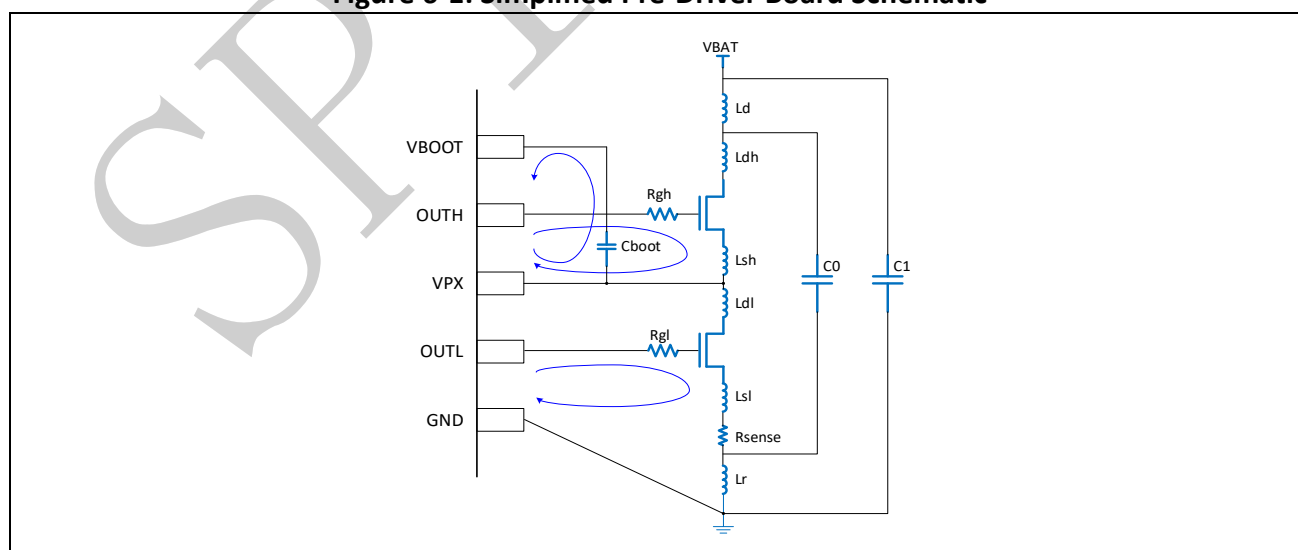

[1] This figure only shows the Pre-Driver one phase circuit diagram. And the Pre-Driver U-phase, V-phase and W-phase circuit diagrams are the same. Motor 0 and 1 signal routing concept are the same.


7 Package information

The package type of SPD1178 is 64-pin QFN ,available in two variants: Type A and Type B.

7.1 QFN64

7.1.1 Package Type A

Figure 7-1: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package outline(A)

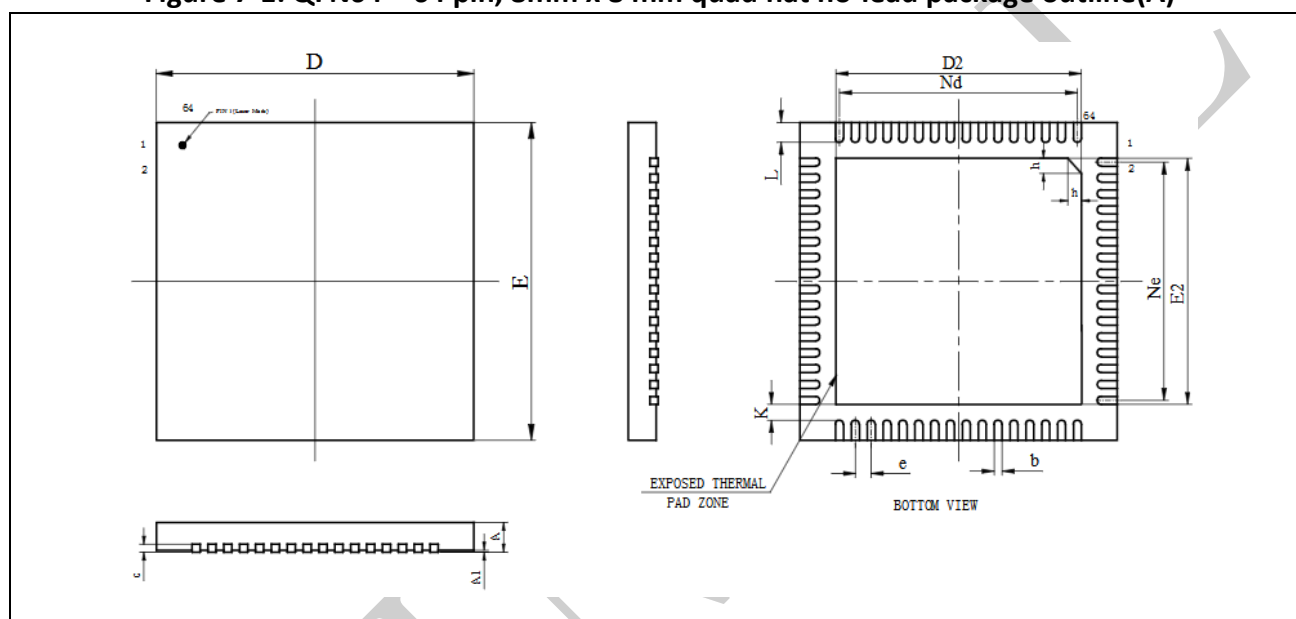

[1] Drawing is not to scale.


Table 7-1: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package mechanical data(A)

Symbol	millimeters			inches ^[1]		
	Min	Typ	Max	Min	Typ	Max
A	0.70	0.75	0.80	0.0276	0.0295	0.0315
A1	—	0.02	0.05	—	0.0008	0.0020
b	0.15	0.20	0.25	0.0059	0.0079	0.0098
c	0.18	0.20	0.25	0.0071	0.0079	0.0098
D	7.90	8.00	8.10	0.3110	0.3150	0.3189
D2	6.10	6.20	6.30	0.2402	0.2441	0.2480
e	—	0.40	—	—	0.0157	—
Nd	—	6.00	—	—	0.2362	—
E	7.90	8.00	8.10	0.3110	0.3150	0.3189
E2	6.10	6.20	6.30	0.2402	0.2441	0.2480
Ne	—	6.00	—	—	0.2362	—
L	0.45	0.50	0.55	0.0177	0.0197	0.0217
K	0.20	—	—	0.0079	—	—
h	0.30	0.35	0.40	0.0118	0.0138	0.0157

[1] Values in inches are converted from mm and rounded to 4 decimal digits.

7.1.2 Package Type B

Figure 7-2: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package outline(B)

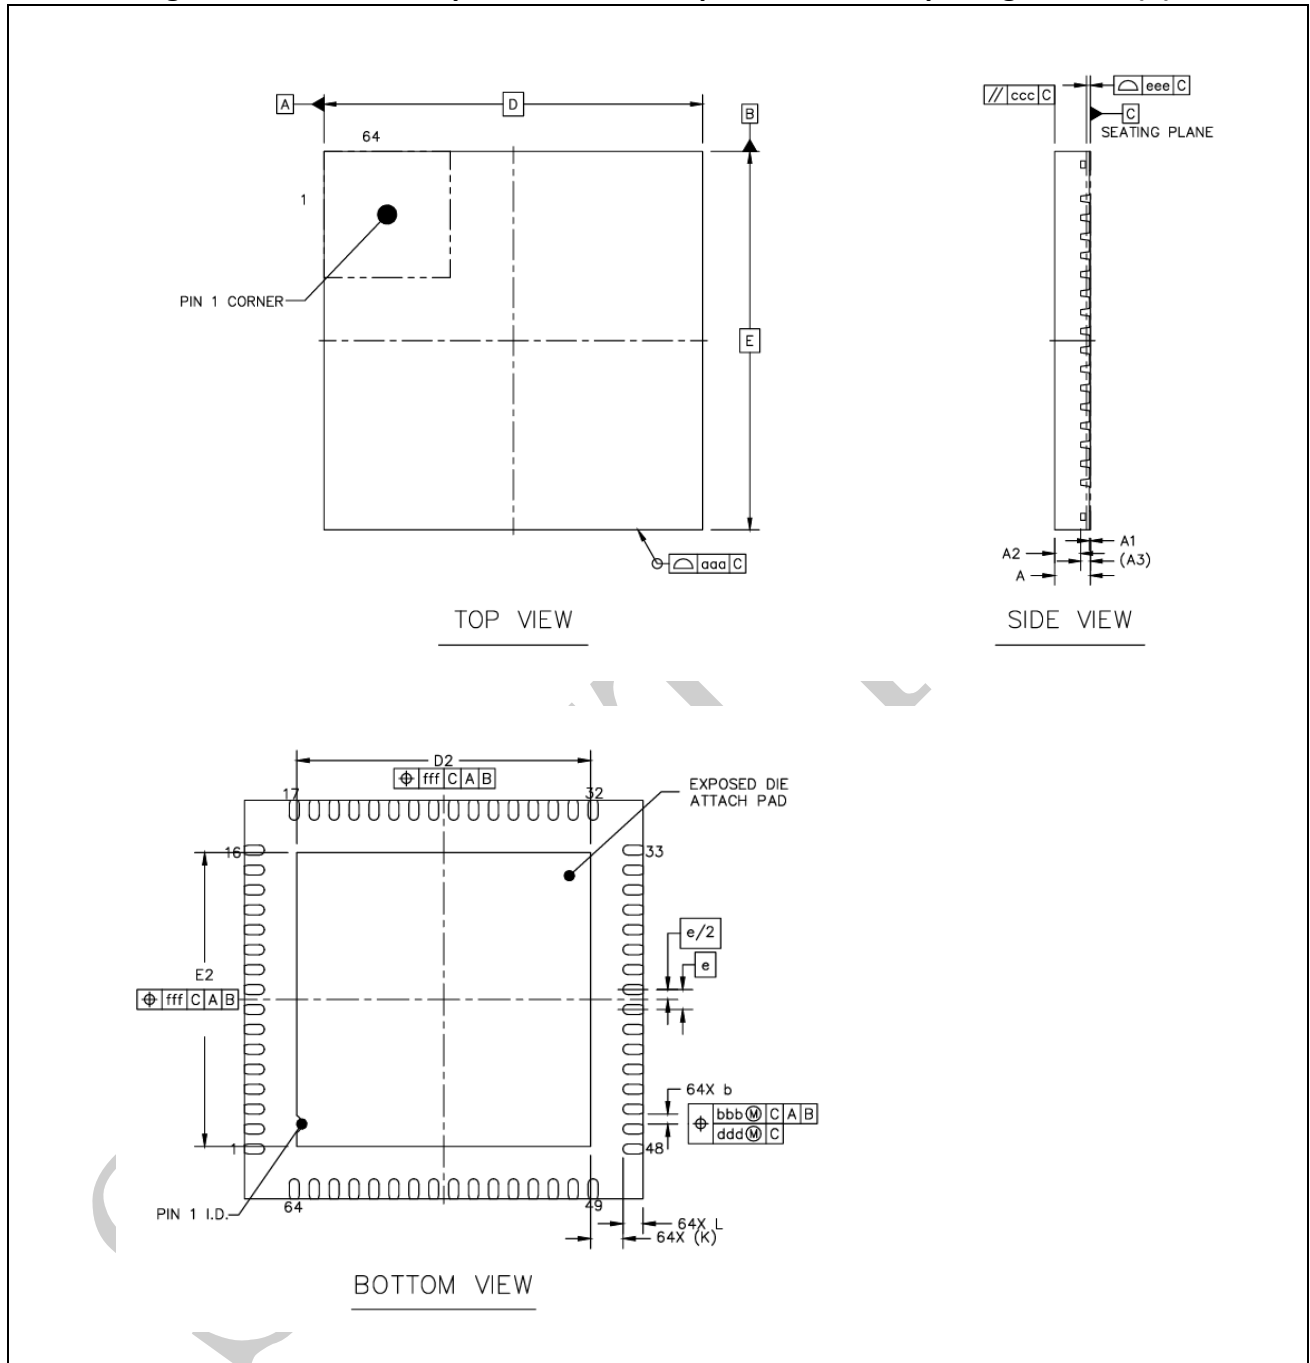


[1] Drawing is not to scale.

Table 7-2: QFN64 – 64 pin, 8mm x 8 mm quad flat no-lead package mechanical data(B)

Symbol	millimeters		
	Min	Typ	Max
A	0.7	0.75	0.8
A1	0	0.02	0.05
A2	–	0.55	–
A3	0.203 REF		
b	0.15	0.2	0.25
D	8 BSC		
E	8 BSC		
e	0.4 BSC		
D2	5.8	5.9	6
E2	5.8	5.9	6
L	0.3	0.4	0.5
K	0.65 REF		
aaa	0.1		
ccc	0.1		
eee	0.08		
bbb	0.07		
ddd	0.05		
fff	0.1		

7.1.3 Recommended Soldering Dimensions

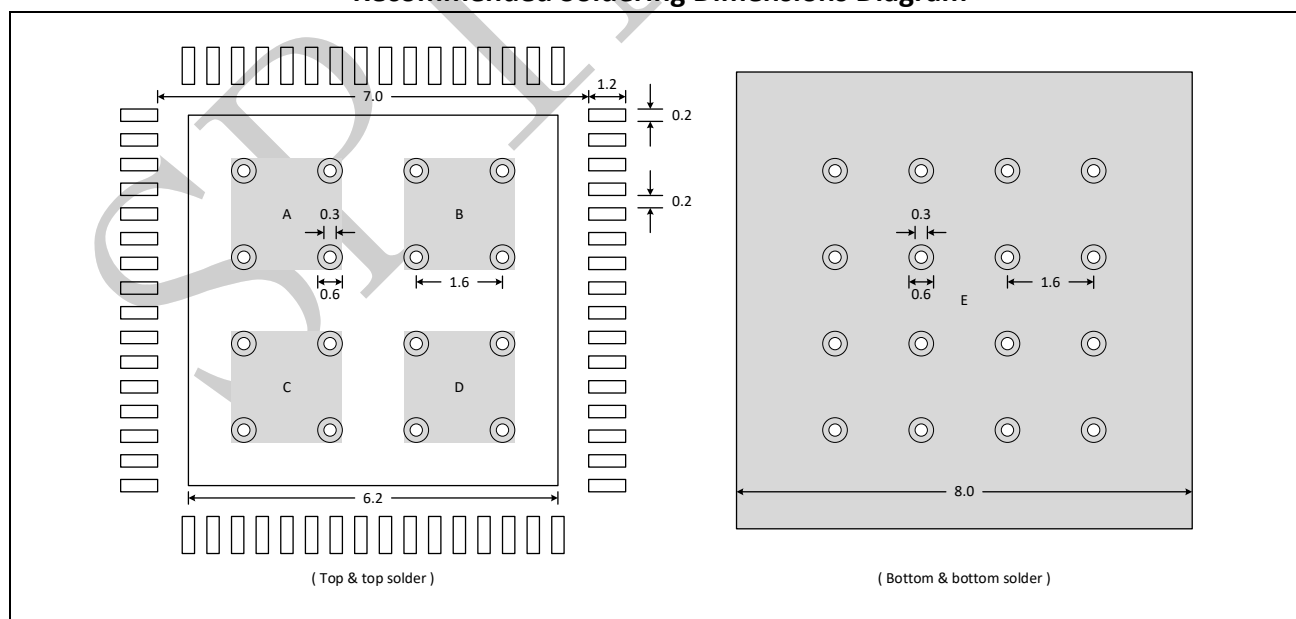Figure 7-3: QFN64 – 64-pin, 8mm x 8mm Quad Flat No-lead Package Land Pattern and Recommended Soldering Dimensions Diagram


- [1] Dimensions are expressed in millimeters.
- [2] The A, B, C, D areas on the top layer should brush solder paste, and E area on bottom layer can either brush solder paste or not.

8 Ordering information

Table 8-1: Ordering information

Ordering Number	Flash	SRAM	Max f_{CPU}	Package	Temperature Range	SPQ ^[1]	Packing
SPD1178API64	128KB	64KB	200MHz	QFN64	Industrial -40 °C to +125 °C	2600	Tray

[1] SPQ = Standard Pack Quantity.

8.1 Rule of ordering number

Figure 8-1: Rule of ordering number

